


Overview

HP recommends Windows Vista® Business

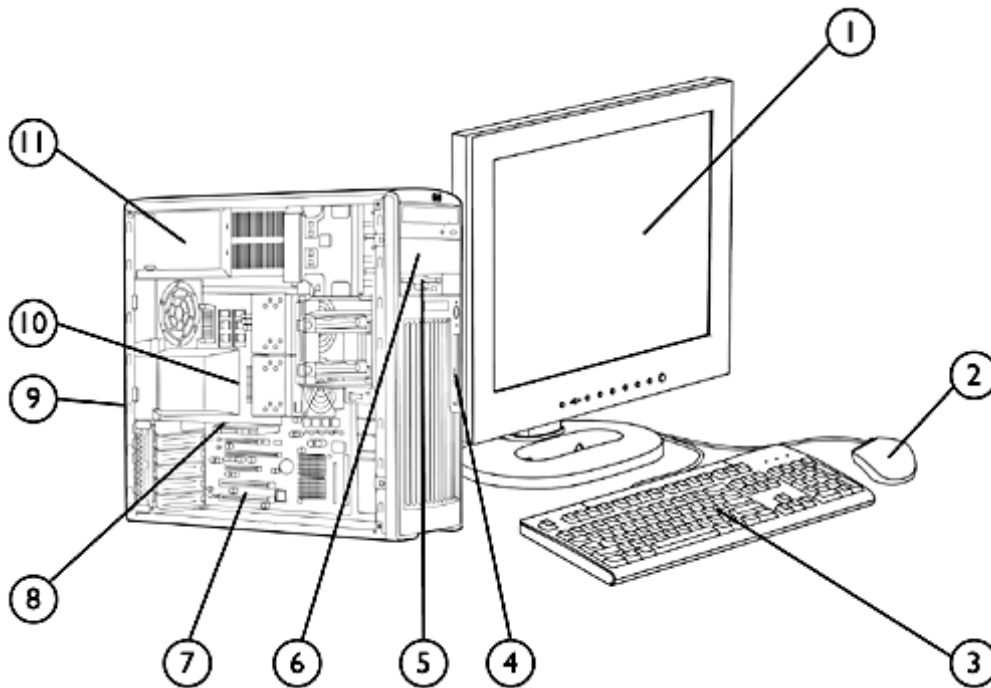

1. Monitor (sold separately)
2. Standard Keyboard (USB or PS/2)
3. Mouse (USB or PS/2)
4. Front IO: 2 USB 2.0, IEEE-1394 (optional), headphone and microphone
5. 3.5" external bay for optional diskette drive or other 3.5" device
6. 2 internal 3.5" bays, 2 external 5.25" bays
7. 2 PCI, 1 PCI Express x16 mechanical/x4 electrical, 2 PCI Express x8 mechanical/x4 electrical
8. 1 PCI Express x16 Graphics Bus
9. 5 USB 2.0 (rear), 1 USB 2.0 (internal), 1 standard serial port, 1 parallel port, 2 PS/2, 1 RJ-45, audio in/out
10. Dual-Core or Quad-Core Intel® Xeon® Processors
11. 575 watt power supply
Optional 575W 80 PLUS power supply also available.

Overview

At A Glance

- Choice of Operating Systems:
 - Genuine Windows Vista Business 32 or 64
 - Genuine Microsoft Windows Vista™ Business 32-bit downgrade to Microsoft Windows XP Professional
 - Genuine Microsoft Windows Vista™ Business 64-bit downgrade to Microsoft Windows XP Professional x64
 - Genuine Windows® XP Professional
 - Genuine Windows XP Professional x64 Edition (see <http://www.hp.com/workstations/pws/windowsxp64/> for details)
 - Red Hat Enterprise Linux WS 3 (32- or 64-Bit version as an after market option)
 - Red Hat Enterprise Linux WS 4 (32- or 64-Bit version)
 - HP Linux Installer Kit (see <http://h20331.www2.hp.com/hpsub/cache/537200-0-0-225-121.html> for details)
- 64-Bit Quad-Core Intel® Xeon® Processor 5300 Sequence (8 MB L2 cache) or Dual-Core Intel® Xeon® Processor 5100 Sequence (4 MB L2 cache)
- 1066 and 1333 MHz Front Side Bus support
- 4-channel 667 MHz FB-DIMM Memory Subsystem
- Up to 16 GB Memory capacity
- PCI Express I/O and Graphics
- Integrated Broadcom 5752 Gigabit Ethernet
- 4 channels of Serial ATA (SATA) 3.0Gb/s natively supported internally; RAID level 0, 1 available on motherboard (HW RAID functionality not supported by Linux)
- 80 PLUS Power supply option
- SATA optical drives now supported
- High Definition integrated audio with internal speaker
- Pre-loaded Manageability Tools
- Protected by HP Services, including a 3 years next business day onsite standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

Standard Features - Custom Components

Processor and Speed –

Up to 2 of the following

Quad-Core Intel Xeon Processor with Intel® 64 Architecture

One or two Quad-Core Intel Xeon Processor 5300 Sequence, 8 MB total L2 cache (2 x 4 MB shared):*

Quad-Core Intel® Xeon® Processor 5310/ 1.60 GHz, 1066 MHz FSB

Quad-Core Intel® Xeon® Processor 5320/ 1.86 GHz, 1066 MHz FSB

Quad-Core Intel® Xeon® Processor 5335/ 2.00 GHz, 1333 MHz FSB

Quad-Core Intel® Xeon® Processor 5345/ 2.33 GHz, 1333 MHz FSB

* When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number/ for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel 64 Architecture -enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information including details on which processors support Intel 64 Architecture or consult with your system vendor for more information.

Dual-Core Intel Xeon Processor with Intel® 64 Architecture

One or two Dual-Core Intel Xeon Processor 5100 Sequence, 4 MB shared L2 cache*

Dual-Core Intel® Xeon® Processor 5110/ 1.60 GHz, 1066 MHz FSB

Dual-Core Intel® Xeon® Processor 5120/ 1.86 GHz, 1066 MHz FSB

Dual-Core Intel® Xeon® Processor 5130/ 2.00 GHz, 1333 MHz FSB

Dual-Core Intel® Xeon® Processor 5140/ 2.33 GHz, 1333 MHz FSB

Dual-Core Intel® Xeon® Processor 5150/ 2.66 GHz, 1333 MHz FSB

Dual-Core Intel® Xeon® Processor 5160/ 3.00 GHz, 1333 MHz FSB

* When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number/ for details. Intel® 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel 64 Architecture -enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information including details on which processors support Intel 64 Architecture or consult with your system vendor for more information.

Power supply option

80 PLUS power supply is optional

Standard Features - Custom Components

Operating System –
One of the following

Genuine Windows Vista Business 64*
 Genuine Windows Vista Business 32*
 Genuine Microsoft Windows Vista™ Business 64-bit downgrade to Microsoft Windows XP Professional x64
 Genuine Microsoft Windows Vista™ Business 32-bit downgrade to Microsoft Windows XP Professional
 Genuine Windows XP Professional SP2
 Genuine Windows XP Professional x64 Edition
 HP Linux Installer CD Box Set for Red Hat Linux 7.2, 7.3 and Workstation 3 (64-Bit)
 HP Linux Installer Kit (see <http://h20331.www2.hp.com/hpsub/cache/537200-0-0-225-121.html>):
 Red Hat Enterprise Linux WS 4 (Update 4 or later) (32- or 64-bit version)
 Red Hat Enterprise Linux WS 3 (Update 8) (32 or 64 bit version)
 For detailed OS/hardware support information for Linux, see:
http://www.hp.com/support/linux_hardware_matrix

1-3 Hard Disk Drives – Up to 3 of the following SATA drives, or 3 of the following SAS drives. (The third HDD would occupy an external 5.25" bay and require a bracket.)	SATA Hard Drive	Windows Vista	Windows XP	Red Hat Linux
	80 GB 7200 rpm SATA 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	160 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	250 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	500 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	750 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	80 GB 10K rpm SATA 1.5Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	160 GB 10K rpm SATA 1.5Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	SAS Hard Drive (SAS Controller is required)			
	146 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	300 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	73 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	146 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
	300 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

Factory integrated RAID on motherboard for SATA drives		Windows Vista	Windows XP	Red Hat Linux
	RAID 0 Configuration – Striped Array	32-Bit - 750 GB HD drive not supported with Vista	32-Bit, 64-Bit	Not supported
	RAID 1 Configuration – Mirrored Array	32-Bit	32-Bit, 64-Bit	Not supported
NOTE: Requires 2 identical hard drives (speeds, capacity, interface).				

Standard Features - Custom Components

Drive controllers

	Windows Vista	Windows XP	Red Hat Linux
Integrated SATA 3.0Gb/s Controller, RAID 0, 1, 10, 5 supported	All RAID levels supported but only RAID 0, 1 is configure-to-order	32-Bit, 64-Bit	WS 3, WS 4 (HW RAID functionality not supported by Linux)
LSI SAS3041E Serial Attach SCSI (SAS) Host Bus Adapter (HBA)	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported

Memory -

One of the following

	Windows Vista	Windows XP	Red Hat Linux
512 MB (1 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit not supported	32-Bit, 64-Bit	WS 3, WS 4
1 GB (2 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
2 GB (4 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
2 GB (2 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
3 GB (2 x 1 GB + 2 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
4 GB (4 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
4 GB (2 x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
6 GB (2 x 2 GB + 2 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
8 GB (4 x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
16 GB (4x 4 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

Standard Features - Custom Components

1 -2 Removable storage (Up to 2 of the following)

	Windows Vista	Windows XP	Red Hat Linux
No Floppy Drive option	N/A	N/A	N/A
1.44-MB Diskette Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
No Optical Drive option	N/A	N/A	N/A
16X DVD-ROM Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
SATA 48X CD-RW/DVD-ROM Combo Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
SATA SuperMulti DVD+/-RW LightScribe Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

** LightScribe software works with Windows only. LightScribe creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players

Keyboard –

One of the following*

	Windows Vista	Windows XP	Red Hat Linux
No Keyboard option	N/A	N/A	N/A
PS/2 Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB Standard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

* Mixing PS/2 and USB Keyboards and Mice are not supported with Linux OS.

Mouse –

One of the following*

	Windows Vista	Windows XP	Red Hat Linux
No Mouse option	N/A	N/A	N/A
PS/2 2-Button Scroll Mouse (mechanical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB 2-Button Scroll Mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
USB 3-Button Mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

* Mixing PS/2 and USB Keyboards and Mice are not supported with Linux OS.

Audio

	Windows Vista	Windows XP	Red Hat Linux
Integrated High Definition Audio with Internal Speaker	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3*, WS 4
HP Optical Drive Internal Audio Cable (Not supported with X-Fi audio card or no optical drive option)	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported
SoundBlaster® X-Fi™ XtremeMusic PCI Audio Card	Not supported	32-Bit, 64-Bit	Not Supported

* Via Linux drivers on HP support website that are not part of RHEL WS3

NIC

	Windows Vista	Windows XP	Red Hat Linux
Integrated Broadcom BCM5752 Gigabit LoM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
Broadcom BCM5751 NetXtreme™ Gigabit Ethernet Controller (PCI-E)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4

Standard Features - Custom Components

PCI Express Graphics

	Windows Vista	Windows XP	Red Hat Linux
No Graphics option	N/A	N/A	N/A
NVIDIA Quadro NVS 285 (128 MB) - 1 or 2 of these cards supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card only)	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro NVS 440 (256 MB) - 1 or 2 of cards supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4 (single card supported only but can be 2nd card with NVS 285)
NVIDIA Quadro FX 560 (128 MB) - 1 or 2 of these cards are supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4
ATI FireGL V3350 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 1500 (256 MB) - 1 or 2 of these cards are supported	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 3500 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
ATI FireGL V7200 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 4500 (512 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4
NVIDIA Quadro FX 4600 PCIe (768 MB)**	Not supported	32-Bit, 64-Bit	WS 3, WS 4

NOTE: ** This card consumes 2 PCIe slots, reducing the maximum number of PCI cards in a system

Miscellaneous

	Windows Vista	Windows XP	Red Hat Linux
IEEE 1394a FireWire 400 4-Port PCI Card	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported
IEEE 1394b FireWire 800 3-Port PCI Card	Not supported	32-Bit, 64-Bit	Not Supported
HP Energy Star 3.0 Enabled Configuration	Not supported	32-Bit	Not Supported
HP Workstation Mouse Pad	N/A	N/A	N/A
Solenoid Hood Lock & Hood Sensor	All	All	All

Standard Features - Custom Components

Software	Windows Vista	Windows XP	Red Hat Linux
Symantec AntiVirus 10 (optional preinstall)	32-Bit, 64-Bit (expected availability in July 2007)	32-Bit, 64-Bit	Not supported
Intervideo WinDVD (DVD-ROM player only)	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
Roxio Easy Media Creator (CD or DVD burner) PDF Complete	32-Bit, 64-Bit 32-Bit, 64-Bit	32-Bit, 64-Bit 32-Bit, 64-Bit	Not supported Not supported
Optional Microsoft Office 2007 Trial Edition	32-Bit (English language only)	32-Bit	Not supported
Optional Microsoft Office 2007 Small Business Edition	32-Bit (English language only)	32-Bit	Not supported
HP Performance Tuning Framework	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
HP Backup and Recovery	32-Bit, 64-Bit	32-Bit, 64-Bit	N/A
HP Client Manager Software v6.2	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported
Optional HP ProtectTools Security Solutions	32-bit, 64-Bit	32-Bit, 64-Bit	Not supported

Standard Features - Specs

Operating System (choice)	Genuine Windows Vista™ Business 64*
	Genuine Windows Vista™ Business 32*
	Genuine Microsoft Windows Vista™ Business 32-bit downgrade to Microsoft Windows XP Professional
	Genuine Microsoft Windows Vista™ Business 64-bit downgrade to Microsoft Windows XP Professional x64
	Genuine Windows XP Professional SP2
	Genuine Windows XP Professional x64 Edition
	OR Red Hat Enterprise Linux WS 4 64-Bit preload (32-Bit version included on recovery CD or as after market option)
	OR Red Hat Enterprise Linux WS 3 (32-Bit & 64-Bit) available as an after market option.
	OR HP Installer Kit for Linux (includes drivers for both 32-Bit & 64-Bit OS versions of RHEL WS 3 and RHEL WS 4)
* The following components are not yet supported on Microsoft Windows Vista Business and HP Workstations; ATI graphics, 1394b cards, dual graphics configurations, Creative SoundBlaster X-fi, RAID 5 10 or data array	
Form Factor	Minitower
Colour	Carbonite/Alloy metallic
System Board Form Factor	12"x9.8"
Processor	1 or 2 Dual-Core Intel® Xeon® Processor 5100 Sequence or Quad-Core Intel Xeon Processor 5300 Sequence with Intel® 64 Architecture
CPU FSB	1066, 1333 MHz
Standard L2 Cache	4 MB L2 shared cache (non ECC) for Dual-Core / 8 MB (2 X 4 MB shared) total L2 cache (non ECC) for Quad-Core
Chipset	Intel 5000X
Memory Expansion Slots	4 DIMMs
Memory Type Supported	DDR2 Registered ECC FB-DIMMs
Memory Speed Supported	667 MHz
Maximum Memory	16 GB (4 DIMMs slots with 4 GB DIMMS)
Network Controller	Integrated Broadcom 5752 Gigabit Ethernet LoM
Audio	Integrated high definition digital audio with S/PDIF 6-channel pass-through, stereo microphone, and Yamaha XG Lite Softsynth support. If using RHEL WS 3, the audio drivers are not included as part of the standard RHEL WS 3 operating system. Use the ALSA audio drivers included on the HP Driver CD or from the HP support website. See http://www.hp.com/support/linux_hardware_matrix and http://www.hp.com/support/linux_user_manual for details.
PCI Slots	2 PCI slots (full-length) 2 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express (x16 mechanically/x4 electrically) 1 PCI Express x16 graphics
Bays	Total Bays = 5
Internal Bays	2 internal 3.5" HDD bays with acoustic dampening rail assemblies
External Bays	2 external 5.25" bays - 203 mm maximum device depth (top bay is limited to 198 mm depth when optional smart cover solenoid lock is installed). Bottom bay can be converted to an internal 3.5 inch 3rd Hard Drive bay using optional bracket One 3.5 inch bay for optional floppy drive

Standard Features - Specs

Front I/O	2 USB 2.0, Headphone, Microphone, optional IEEE 1394 NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.	
Internal I/O	1 USB 2.0 header	
Rear I/O	5 USB 2.0, 1 standard serial port, 1 parallel port, PS/2 keyboard and mouse, 1 RJ-45 to integrated Gigabit LAN, Audio In, Audio Out, Microphone In	
Choice of PS/2 or USB Keyboard	1	
Choice of PS/2 or USB Mouse	1	
Chassis Dimensions (H x W x D)	17.3 x 6.5 X 17.3 inches; 44.1 x 16.5 x 44.0 cm	
System Weight	Minimum config – 14.60 kg (32.30 lbs) Maximum config – 18.11 kg (39.94 lbs)	
Temperature	Operating	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	575W wide-ranging, active Power Factor Correction	
Interfaces Supported	4-channel SATA interface (4 Serial-ATA connectors each), 2 EIDE interface (2 EIDE connectors) supported for optical drives, USB 2.0, IEEE 1394 (optional)	
Hard Drive Controller Supported	SATA (integrated) or optional SAS (PCIe) controllers	

Standard Features - Preconfigured Global SKU's

xw6400X/XG1.60/ D80/R1.0/285d/p RD687AW#ABA (Eng) RD687AW#ABC (Fr. Can.)	OS	Genuine Windows XP Professional (32-bit)
	Base unit	HP xw6400 Workstation base unit
	Localization kit	HP xw6400 Workstation localization kits
	Processor 1	Dual-Core Intel Xeon 5110/ 1.60 GHz, 4 MB L2, /1066 MHz FSB
	Processor 2	NA
	Memory	1 GB (2 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered –DIMM
	Hard Drive	HP 80 GB 7200 rpm SATA 3.0Gb/s
	Controller	NA
	Optical Drive	HP 16X DVD-ROM
	Graphics	NVIDIA Quadro NVS 285 PCIe (128 MB)
	Floppy disk drive	NA
	Keyboard	HP USB standard keyboard
	Mouse	HP USB optical scroll mouse

xw6400X/XG2.00+/ D80/R2.0/285d/p RD688AW#ABA (Eng) RD688AW#ABC (Fr. Can.)	OS	Genuine Windows XP Professional (32-bit)
	Base unit	HP xw6400 Workstation base unit
	Localization kit	HP xw6400 Workstation localization kits
	Processor 1	Dual-Core Intel Xeon 5130/ 2 GHz, 4 MB L2, /1333 MHz FSB
	Processor 2	Dual-Core Intel Xeon 5130/ 2 GHz, 4 MB L2, /1333 MHz FSB
	Memory	2 GB (2 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM
	Hard Drive	HP 80 GB 7200 rpm SATA 3.0Gb/s
	Controller	NA
	Optical Drive	HP 16X DVD-ROM
	Graphics	NVIDIA Quadro NVS 285 PCIe (128 MB)
	Floppy disk drive	NA
	Keyboard	HP USB standard keyboard
	Mouse	HP USB optical scroll mouse

Standard Features - Preconfigured Global SKU's

xw6400X/XG2.33+/ E80/R2.0/285d/p RD689AW#ABA (Eng.) RD689AW#ABC (Fr. Can.)	OS	Genuine Windows XP Professional (32-bit)
	Base unit	HP xw6400 Workstation base unit
	Localization kit	HP xw6400 Workstation localization kits
	Processor 1	Dual-Core Intel Xeon 5140 2.33 GHz, 4 MB L2, /1333 MHz FSB
	Processor 2	Dual-Core Intel Xeon 5140 2.33 GHz, 4 MB L2, /1333 MHz FSB
	Memory	2 GB (2 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM
	Hard Drive	HP 80 GB 10K rpm SATA 3.0Gb/s NCQ
	Controller	NA
	Optical Drive	HP 16X DVD-ROM
	Graphics	NVIDIA Quadro NVS 285 PCIe (128 MB)
	Floppy disk drive	NA
	Keyboard	HP USB standard keyboard
	Mouse	HP USB optical scroll mouse
<hr/>		
xw6400X/XG2.66+/ B73a/R4.0/285d/p RD690AW#ABA (Eng.) RD690AW#ABC (Fr. Can.)	OS	Genuine Windows XP Professional (32-bit)
	Base unit	HP xw6400 Workstation base unit
	Localization kit	HP xw6400 Workstation localization kits
	Processor 1	Dual-Core Intel Xeon 5140 2.66 GHz, 4 MB L2, /1333 MHz FSB
	Processor 2	Dual-Core Intel Xeon 5140 2.66 GHz, 4 MB L2, /1333 MHz FSB
	Memory	HP 4 GB (2x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM
	Hard Drive	HP 73 GB 15K rpm SAS 3.0Gb/s
	Controller	LSI 3041E 4-port SAS/SATA RAID card
	Optical Drive	HP 16X DVD-ROM
	Graphics	NVIDIA Quadro NVS 285 PCIe (128 MB)
	Floppy disk drive	NA
	Keyboard	HP USB standard keyboard
	Mouse	HP USB optical scroll mouse

Standard Features - Preconfigured Global SKU's

xw6400X/XG2.66+/ B73a/R4.0/285d/p RV741AW#ABA (Eng.) RV741AW#ABC (Fr. Can.)	OS	Genuine Windows XP Professional (32-bit)
	Base unit	HP xw6400 Workstation base unit
	Localization kit	HP xw6400 Workstation localization kits
	Processor 1	Dual-Core Intel Xeon 5160 3.00 GHz, 4 MB L2, /1333 MHz FSB
	Processor 2	Dual-Core Intel Xeon 5160 3.00 GHz, 4 MB L2, /1333 MHz FSB
	Memory	HP 4 GB (2x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM
	Hard Drive	HP 250 GB 17200 rpm SATA 3.0Gb/s
	Optical Drive	HP 16X DVD-ROM
	Graphics	NVIDIA Quadro NVS 285 PCIe (128 MB)
	Floppy disk drive	NA
	Keyboard	HP USB standard keyboard
	Mouse	HP USB optical scroll mouse

xw6400X/XQ1.86+/ F160/R4.0/285+d/p GH741AW#ABA (Eng.) GH741AW#ABC (Fr. Can.)	OS	Microsoft Windows XP Pro 32-bit OS
	Base unit	HP xw6400 Workstation Base Unit
	Localization kit	HP xw6400 Localization Kit
	Processor	Intel Xeon 5320 1.86 8MB/1066 QC 1st CPU Intel Xeon 5320 1.86 8MB/1066 QC 2nd CPU
	Memory	HP 4GB (4x1GB) DDR2-667 ECC FBD RAM
	Hard Drive	HP 160GB SATA 3Gb/s NCQ 7200 1st HDD
	Optical Drive	HP 16X/48X DVD-ROM 1st Drive
	Graphics	NVIDIA Quadro NVS 285 128MB PCIe NVIDIA Quadro NVS 285 128M PCIe (2nd)
	Floppy disk drive	No Floppy Disk Option
	Keyboard	HP USB Standard Keyboard
	Mouse	HP USB Optical Scroll Mouse

Standard Features - Preconfigured Global SKU's

xw6400X/XR2.33+/ F250/R4.0/Xd/s GH742AW#ABA (Eng.) GH742AW#ABC (Fr. Can.)	OS	Microsoft Windows XP Pro 32-bit OS
	Base unit	HP xw6400 Workstation Base Unit
	Localization kit	HP xw6400 Localization Kit
	Processor	Intel Xeon 5345 2.33 8MB/1333 QC 1st CPU Intel Xeon 5345 2.33 8MB/1333 QC 2nd CPU
	Memory	HP 4GB (2x2GB) DDR2-667 ECC FBD RAM
	Hard Drive	HP 250GB SATA 3Gb/s NCQ 7200,1st HDD
	Optical Drive	HP 16X/48X DVD-ROM 1st Drive
	Graphics	HP No Graphics Option
	Floppy disk drive	No Floppy Disk Option
	Keyboard	HP PS/2 Standard Keyboard
	Mouse	HP PS/2 Scroll Mouse

Standard Features - Preconfigured Regional Models

xw6400X/XG2.0/ D80/R1.0/Xv/p RB391UA#ABA (Eng.) RB391UA#BC (Fr. Can.)	OS	MS Windows XP Pro 32-bit US
	Base unit	HP xw6400 Workstation Base Unit
	Localization kit	xw6400 Localization Kit US
	Processor	Xeon 5130 2.00 4MB/1333 DC (1st)
	Memory	1GB (2x512) DDR2-667 ECC FBD
	Hard Drive	80GB SATA 3Gb/s 7200 (1st)
	Optical Drive	HP 48X CD-RW/DVD Combo SATA 1st Drive
	Graphics	No Graphics Option
	Floppy disk drive	No Floppy Disk Option
	Keyboard	HP PS/2 Standard Keyboard US
	Mouse	HP USB Optical Scroll Mouse

xw6400X/XG2.33/ F160/R1.0/Xv/p RB392UA#ABA (Eng.) RB392UA#ABC (Fr. Can.)	OS	MS Windows XP Pro 32-bit US
	Base unit	HP xw6400 Workstation Base Unit
	Localization kit	xw6400 Localization Kit US
	Processor	Intel Xeon 5140 2.33 4MB/1333
	Memory	1GB (2x512) DDR2-667 ECC FBD
	Hard Drive	160GB SATA 3Gb/s NCQ 7200
	Optical Drive	HP 48X CD-RW/DVD Combo SATA 1st Drive
	Graphics	No Graphics Option
	Floppy disk drive	No Floppy Disk Option
	Keyboard	HP PS/2 Standard Keyboard US
	Mouse	HP USB Optical Scroll Mouse

xw6400X/XG2.66/ A146a/R1.0/Xv/p RB393UA#ABA (Eng.) RB393UA#ABC (Fr. Can.)	OS	MS Windows XP Pro 32-bit US
	Base unit	HP xw6400 Workstation Base Unit
	Localization kit	xw6400 Localization Kit US
	Processor	Intel Xeon 5150 2.66 4MB/1333
	Memory	1GB (2x512) DDR2-667 ECC FBD
	Hard Drive	146GB SAS 3Gb/s 10K
	Controller	LSI 3041E 4-port SAS/SATA RAID Card
	Optical Drive	HP 48X CD-RW/DVD Combo SATA 1st Drive
	Graphics	No Graphics Option
	Floppy disk drive	No Floppy Disk Option
	Keyboard	HP PS/2 Standard Keyboard US
	Mouse	HP USB Optical Scroll Mouse

After-Market Options

Processors		Part Number
	2nd Quad-Core Intel® Xeon® processor 5300 Series with Intel64 Architecture, and 8 MB of L2 cache (2x4 MB shared)	
	Quad-Core Intel Xeon Processor 5310/ 1.60 GHz,1066 MHz FSB	RQ538AA
	Quad -Core Intel Xeon Processor 5320/ 1.86 GHz,1066 MHz FSB	RM054AA
	Quad -Core Intel Xeon Processor 5335/ 2.00 GHz,1333 MHz FSB	RQ539AA
	Quad -Core Intel Xeon Processor 5345/ 2.33 GHz,1333 MHz FSB	RQ540AA
	2nd Dual-Core Intel Xeon processor 5100 Series with Intel® 64 Architecture, and 4 MB of Shared L2 cache	
	Dual-Core Intel Xeon Processor 5110/ 1.60 GHz,1066 MHz FSB	EY012AA
	Dual-Core Intel Xeon Processor 5120/ 1.86 GHz,1066 MHz FSB	EY013AA
	Dual-Core Intel Xeon Processor 5130/ 2.00 GHz,1333 MHz FSB	EY014AA
	Dual-Core Intel Xeon Processor 5140/ 2.33 GHz,1333 MHz FSB	EY015AA
	Dual-Core Intel Xeon Processor 5150/ 2.66 GHz,1333 MHz FSB	EY016AA
	Dual-Core Intel Xeon Processor 5160/ 3.00 GHz,1333 MHz FSB	EY017AA

NOTE: Upgrade from Intel Xeon processor 5000 series not supported. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/products/processor_number/ for details.

Intel 64 Architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel 64 Architecture. Processor will not operate (including 32-bit operation) without an Intel 64 Architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://www.intel.com/technology/64bitextensions> for more information including details on which processors support Intel 64 Architecture or consult with your system vendor for more information.

Quad-Core and Dual-Core are new technologies designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.

After-Market Options

Graphics (PCI Express)	Multi display solutions	Windows Vista	Windows XP	Red Hat Linux	Part Number
	NVIDIA Quadro NVS 285 (128 MB) - 1 or 2 of these cards supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card only)	32-Bit, 64-Bit	WS 3, WS 4	RD069AA
	NVIDIA Quadro NVS 440 (256 MB) - 1 or 2 of cards supported (2nd card not supported on Windows Vista, or Linux (except with NVS 285))	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4	PT453A
	NVIDIA Quadro FX 560 (128 MB) - 1 or 2 of these cards are supported (2nd card not supported on Windows Vista)	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4	ES354AA
	ATI FireGL V3350 PCIe (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RV705AA
	NVIDIA Quadro FX 1500 (256 MB) - 1 or 2 of these cards are supported	32-Bit, 64-Bit (single card supported only)	32-Bit, 64-Bit	WS 3, WS 4	ES355AA
	NVIDIA Quadro FX 3500 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES357AA
	ATI FireGL V7200 (256 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ES356AA
	NVIDIA Quadro FX 4500 (512 MB)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA762AA
	NVIDIA Quadro FX 4600 PCIe (768 MB)**	Not supported	32-Bit, 64-Bit	WS 3, WS 4	RV706AA

* Two NVIDIA Quadro NVS 285 PCIe cards may be used together on any OS except Windows Vista™ which does not support two NVS 285 cards. An NVS 285 and an NVS 440 can be supported together under Microsoft Windows XP. Two NVIDIA Quadro FX 1500 PCIe cards may be used together on Windows XP 32-bit and x64. One NVIDIA Quadro NVS 440 PCIe and NVIDIA Quadro NVS 285 PCIe may be used together on Windows XP 32-bit.

After-Market Options

Hard Drives	SATA Hard Drives	Windows Vista	Windows XP	Red Hat Linux	Part Number
	80 GB 7200 rpm SATA 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PY276AA
	160 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV944A
	250 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA788AA
	500 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	PV943A
	750 GB 7200 rpm SATA 3.0Gb/s NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RH201AA
	80 GB 10K rpm SATA NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM172AA
	160 GB 10K rpm SATA NCQ drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW222AA
	SAS Hard Drives				
	146 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM173AA
	300 GB 10K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	RH937AA
	73 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA329AA
	146 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA330AA
	300 GB 15K rpm SAS 3.0Gb/s drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM174AA

Controllers	PCIe	PCI-X	Windows Vista	Windows XP	Red Hat Linux	Part Number
LSI SAS3041E 4-Port, Host Bus Adapter (NCQ Adapter (Native Command Queuing) is not supported on this card at this time.)	X		32-Bit, 64-Bit	32-Bit, 64-Bit		EH417AA
LSI MegaRAID SAS 8344ELP 8-port, PCI Express SAS RAID Adapter	X		32-Bit, 64-Bit (RAID 5, 10 not supported)	32-Bit, 64-Bit		EX830AA

After-Market Options

1394 PCI Cards	PCI	PCI-X	Windows Vista	Windows XP	Red Hat Linux	Part Number
IEEE 1394a FireWire 400 4-Port PCI Card	X		32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported	PA997A
IEEE 1394b FireWire 800 3-Port PCI Card	X		Not supported	32-Bit, 64-Bit	Not supported	EA327AA

Input/Output Devices*	Keyboards	Windows Vista	Windows XP	Red Hat Linux	Part Number
	HP PS/2 Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DT527A
	HP USB Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DT528A
	HP USB Smartcard Keyboard	32-Bit, 64-Bit	32-Bit, 64-Bit	Not supported	ED707AA
	Pointing Devices				
	HP PS/2 2-Button Scroll Mouse (mechanical) (Carbonite)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DD440B
	HP USB 2-Button Scroll Mouse (optical) (Carbonite/Silver)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DC172B
	HP USB 3-Button Mouse (optical)	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DY651A
	USB SpacePilot	TBD	32-Bit, 64-Bit	Not supported	EF390AA
	HP USB SpaceExplorer USB 3D Input Device	32-Bit, 64-Bit	32-Bit, 64-Bit	Not Supported	RY429AA

* Mixing PS/2 and USB Keyboards and Mice are not supported with Linux OS.

Networking	NICs	PCIe	PCI-X	Windows Vista	Windows XP	Red Hat Linux	Part Number
	Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)	X		32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EA833AA

After-Market Options

Memory modules	667 MHz	Windows Vista	Windows XP	Red Hat Linux	Part Number
	512 MB (1 x 512 MB) PC2-5300F DDR2-667 ECC registered Fully Buffered - DIMM	32-bit, 64-bit supported (must be more than 1 stick)	32-Bit, 64-Bit	WS 3, WS 4	EM159AA
	1 GB (1 x 1 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM160AA
	2 GB (1 x 2 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM161AA
	4 GB (1 x 4 GB) PC2-5300F DDR2-667 ECC registered Fully Buffered -DIMM	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EM162AA

Monitors (Supported by all Operating Systems available from HP)	TFT displays	Part Number
	HP LP3065 30-inch Widescreen LCD Monitor	EZ320A4
	HP LP2465 24-inch Widescreen LCD Monitor	EF224A4
	HP L2065 20-inch LCD Monitor	EF227A4
	HP L1965 19-inch LCD Monitor	RA373AA

Optical drives	DVD-ROM Drive	Windows Vista	Windows XP	Red Hat Linux	Part Number
	HP 16X DVD-ROM Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	AA620B
	CD-ROM Drive				
	SATA 48X CD-RW/DVD-ROM Combo Drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW267AA
	DVD+/-RW Drive				
	SATA SuperMulti DVD+/-RW LightScribe*	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	EW269AA

*LightScribe software works with Windows only. LightScribe creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players

After-Market Options

Removable Storage	Windows Vista	Windows XP	Red Hat Linux	Part Number
HP 512 MB USB 2.0 Drive Key	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	ED516AA
HP 1 GB USB 2.0 Drive Key	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	AG382AA
1.44 MB Internal Floppy Drive	TBD	32-Bit	WS 3, WS 4	DY670AA
HP 16-In-1 Media Card Reader with PCI Card 3Q	TBD			EM718AA
HP StorageWorks DAT 40 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW023A
HP StorageWorks DAT 40 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW022A
HP StorageWorks DAT 72 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW027A
HP StorageWorks DAT 72 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	DW026A
HP StorageWorks DAT 160 USB external tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	Q1581A
HP StorageWorks DAT 160 USB internal tape drive	32-Bit, 64-Bit	32-Bit, 64-Bit	WS 3, WS 4	Q1580A

Audio	Windows Vista	Windows XP	Red Hat Linux	Part Number
HP Satellite Stereo Speakers	32-Bit, 64-Bit	32-Bit, 64-Bit	32-Bit, 64-Bit	ZD929AA
HP USB Powered Speakers	32-Bit, 64-Bit	32-Bit, 64-Bit	32-Bit, 64-Bit	RD628AA
SoundBlaster X-Fi XtremeMusic Audio Card	Not supported	32-Bit, 64-Bit	Not supported	EA326AA

Brackets/Rack Kits	Part Number
xw64 Depth Adjustable Sliding Rail Rack Kit	DY663A
HP Optical Bay HDD Mounting Bracket	DY659A

Other Devices	Part Number
HP Internal USB Port Kit	EM165AA
HP Power Cord Kit	DM293A

Security features	Part Number
HP Business PC Security Lock Kit	PV606AA
Kensington Security Cable & Lock	PC766A
HP Solenoid Hood Lock/Sensor Kit	DE618A

After-Market Options



Software	Windows Vista	Windows XP	Red Hat Linux	Part Number
HP Remote SW for HP 1year Update Subscription	Future support	32-Bit	Not supported	PN680A
HP Remote SW Receiver 1year Update Subscription	Future support	32-Bit	Not supported	PN682A
HP Remote Graphics SW V3 for HP Systems LTU	Future support	32-Bit	Not supported	PY682AA
HP Remote Graphics SW V3 Receiver LTU	Future support	32-Bit	Not supported	PY684AA
HP Remote Graphics SW V3 CD-ROM Media	Future support	32-Bit	Not supported	PY685AA
HP ProtectTools Quantity 1 Software	32-Bit, 64-Bit	32-Bit	Not supported	EM530AA
HP ProtectTools Quantity 25 Software	32-Bit, 64-Bit	32-Bit	Not supported	EM531AA
HP ProtectTools Quantity 500 Software	32-Bit, 64-Bit	32-Bit	Not supported	EM532AA

Memory

Intel 5000X Chipset

PC2-5300F DDR2-667 ECC Registered Fully Buffered DIMM

The Intel 5000X chipset supports ECC Registered DDR2 667 MHz FB-DIMMs only. The motherboard has 4 DIMM slots. Use only fully buffered, PC2-5300F DIMMs. Match multiple DIMMs by size and type. Use HP memory only.

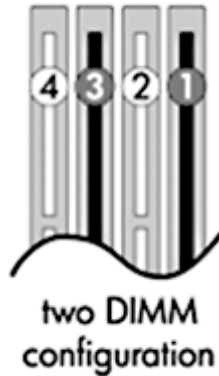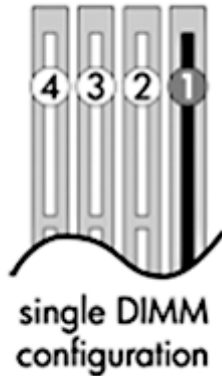

If only using 1 DIMM, install in socket 1. If using 2 DIMMs, install them in sockets 1 & 3. If using 4 DIMMs, install them in all sockets.

MAXIMUM MEMORY

Supports up to 16 GB of DDR2 FB-DIMM SDRAM.


POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below.

DIMM Size	Slot			
	1	2	3	4
512 MB	512 MB			
1 GB	512 MB		512 MB	
2 GB	1 GB		1 GB	
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1 GB	1 GB	1 GB
8 GB	2 GB	2 GB	2 GB	2 GB
16 GB	4 GB	4 GB	4 GB	4 GB

Storage

Tower configuration

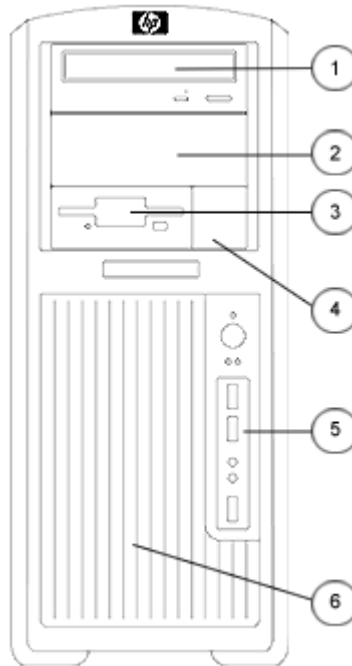

Quantity Supported

Position Supported

Controller

Minitower

Optional Diskette Drive
 5.25" storage drive bays
 (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)
 3.5" storage drive bays with acoustic dampening rail assemblies

Quantity Supported	Position Supported	Controller
1	3	IDE
2	1, 2	IDE (or SATA with new SATA optical drives)
2 (3)	5 (and 2, for 3rd drive using optical bay)	SATA or optional SAS Factory Integrated RAID*

SATA and SAS may be mixed only in a Windows configuration and with the inclusion of an optional SAS controller. Here are the rules for mixing hard drives:

1. The boot/data drive must be SATA to load before any SAS drive.
2. Any size or speeds may be chosen for drives
In non-mixed Microsoft

Storage

Windows and Linux systems, rules 2 & 3 apply.

Configure-to-order RAID configs must all have the same size/speed hard drives.

Up to 4 channels of SATA can be supported natively.

NOTE*: Factory Integrated RAID 0 Configuration (Striped Array) and RAID 1 Configuration (Mirrored Array) requires 2 hard drives with identical speeds, capacity and interface. Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

Technical Specifications

System Board	
Processor Architecture	Quad-Core Intel® Xeon® Processor 5300 sequence or Dual-Core Intel® Xeon® Processor 5100 sequence
Chipset	Intel® 5000X
Super I/O Controller	SMSC SCH5307
System Board Form Factor	9.8"x12.0"
Processor Socket	Dual LGA 771
DIMM Connectors (FBD DDR2)	4
PCI Connectors (5.0V)	2 full length 33 MHz 32-Bit
PCI Express Connectors	1 PCI Express x16 graphics 2 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express (x16 mechanical/x4 electrically)
Flash ROM	Yes
HD Integrated Audio	Yes
CD-ROM inches; audio	No
AUX inches; audio	Yes
Clear CMOS Button	Yes
CPU Fan Headers	Yes
Chassis Fan Headers	Yes
Chassis Speaker Header	Yes
Front Control Panel/Speaker Header	Yes
CMOS Battery Holder - Lithium	Yes
Hood Lock Header	No
Hood Sensor Header	No
Multibay Header	No
Integrated Gigabit Ethernet	Broadcom BCM5752
Wake on LAN	Yes
Integrated Trusted Platform Module	TPM 1.2 expected availability is for systems sold beginning in 2007
ASF 2.0 (Alert Standard Format)	Yes
Integrated SATA RAID	<ul style="list-style-type: none"> ● RAID 0, RAID 1*, RAID 5 and RAID 10 ● Supports one RAID array with 2-4 drives ● RAID 0 configuration - striped array (supported and configure to order under Microsoft Windows Vista) ● RAID 1 configuration - mirrored array ● RAID 5 parity striping (supported but not configure to order under Microsoft Windows Vista) ● RAID 10 stripe of mirrors (supported but not configure to order under Microsoft Windows Vista)

Technical Specifications

	NOTE: HW RAID functionality not supported by Linux. Use SW RAID functionality provided in the Red Hat Operating system instead.
SATA Connectors	4 ports/connectors
IEEE 1394a or 1394b	No integrated 1394a or 1394b – optional PCI card required. Cable from Front IO can be plugged into PCI Card. Not supported in Linux
USB 2.0 Connectors	8 (5 rear, 2 on header for front, 1 internal)
Power Supply Headers	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes

Cooling Solutions	
Power Supply Fan	92x25 mm variable speed
Processor Heatsink Fan(s)	80x15 mm
Rear Chassis Fan(s)	Two 92x32 mm

Power Supply		
Power Supply	575 Watt wide-ranging, active Power Factor Correction	
Operating Voltage Range	90 – 269 VAC	
Rated Voltage Range	100 – 240 VAC	118 VAC
Rated Line Frequency	50/60Hz	400Hz
Operating Line Frequency Range	47–66Hz	393–407Hz
Rated Input Current	10 A @ 100-120VAC 6 A @ 200-240 VAC	9.7 @ 118 VAC
Heat Dissipation (configuration and software dependent)	Typical 980 btu/hr (247 kg-cal/hr) Maximum 3413 btu/hr (860 kg-cal/hr)	
Power Supply Fan	92x25 mm variable speed	
Blue Angel Compliant (<5w in S5 – power off)	N/A	
FEMP Standby Power compliant @ 115V (<2W in S5 – power off)	YES	
Power Consumption in ES mMode – Suspend to RAM (S3) (instantly available PC)	< 7 W	

Technical Specifications

80 PLUS Power Supply		
Power Supply	575 Watt wide-ranging, active Power Factor Correction	
Operating Voltage Range	90 – 269 VAC	
Rated Voltage Range	100 – 240 VAC	118 VAC
Rated Line Frequency	50/60Hz	400Hz
Operating Line Frequency Range	47–66Hz	393–407Hz
Rated Input Current	7A @ 100-120VAC 3 A @ 200-240 VAC	6.7 @ 118 VAC
Heat Dissipation (configuration and software dependent)	Typical 699 btu/hr (176 kg-cal/hr) Maximum 2804 btu/hr (706 kg-cal/hr)	
Power Supply Fan	92x25 mm variable speed	
Blue Angel Compliant (<5w in S5 – power off)	N/A	
FEMP Standby Power compliant @ 115V (<2W in S5 – power off)	YES	
Power Consumption in ES mMode – Suspend to RAM (S3) (instantly available PC)	< 7 W	

ROM Features	Description
ROM Based F10 Setup and Diagnostics	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (remote boot from server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM Revision Levels	<ul style="list-style-type: none"> Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
System Board Revision Level	<ul style="list-style-type: none"> Allows management SW to read the revision level of the system board Revision level is digitally encoded into the hardware and cannot be modified
Auto Setup when new hardware installed	System automatically detects addition of new hardware
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration

Technical Specifications

Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Memory Change Alert (requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> ● NORMAL – normal temperature ranges ● ALERTED – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown ● SHUTDOWN – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs
Master Boot Record Security	Detects changes to MBR and optional restoration, useful in protecting from viruses
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/Shutdown	<ul style="list-style-type: none"> ● System administrators can power on, restart, and power off a client computer from a remote location. ● Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM
ACPI (Advanced Configuration and Power Interface)	<ul style="list-style-type: none"> ● Allows the system to wake from a low power mode ● Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system Supports ACPI 2.0 for full compatibility with 64-Bit operating systems
Keyboard-less Operation	The system can be operated without a keyboard
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
Localized ROM Setup	Common BIOS image supports configuration (Setup) in 11 languages, with local keyboard mappings
Asset Tag	Allows user or MIS to set unique tag string in ROM
Ownership Tag	Allows user or MIS to set unique tag string in ROM
Memory Scrubbing	Allows memory controller to transparently correct transient ECC errors in the background
Memory Remapping	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Windows XP 64-Bit edition, Linux)
Per-slot Control	Allows individual slot configuration (option ROM., latency)
Adaptive Cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot Diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

Technical Specifications

Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0
BBS	BIOS Boot Specification v1.01
BIOS 32-Bit Services	Standard BIOS 32-Bit Service Directory Proposal
CD Boot	"El Torrito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	<ul style="list-style-type: none"> PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	PCI Express Base Specification, Revision 1.0a
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0
SAS	SAS specification 1.1
SMBIOS	System Management BIOS Reference Specification, Version 2.4
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB 1.1	Universal Serial Bus Revision 1.1 Specification
USB 2.0	Universal Serial Bus Revision 2.0 Specification

Other Deployment & Management Features

HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated.</p> <p>HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> Get valuable hardware information such as CPU, memory, video, and security settings Monitor system health to fix problems before they occur Install drivers and BIOS updates without visiting each PC Remotely configure BIOS and security settings Automate processes to quickly resolve hardware problems <p>Additional solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> Inventory assessment Software license compliance Personality migration Software image deployment Software distribution Asset management
---------------------------------------	--

Technical Specifications

	<ul style="list-style-type: none"> • Client backup and recovery • Problem resolution <p>Visit http://www.hp.com/go/clientmanager for more information, to download HP Client Manager Software.</p>
HP ProtectTools	<p>HP ProtectTools Security Manager can be configured to prevent unauthorized access using Smart Cards, TPM Embedded security chips, USB tokens and other security technologies. HP ProtectTools Security Manager is completely customizable, which gives customers the flexibility to choose the level of security that best meets their needs.</p> <ul style="list-style-type: none"> • Smart Card security for HP ProtectTools <ul style="list-style-type: none"> ○ Initialization and configuration of the Smart Card ○ Manage Smart Card accounts and security settings • Embedded Security for HP ProtectTools <ul style="list-style-type: none"> ○ TPM Embedded Security Chip configuration and management • Credential Manager for HP ProtectTools <ul style="list-style-type: none"> ○ Multifactor Windows Authentication ○ Single sign-on • BIOS configuration for HP ProtectTools <ul style="list-style-type: none"> ○ BIOS configuration and security settings from within the HP ProtectTools Security Manager console <p>Visit http://h18004.www1.hp.com/products/security/ for more information on HP ProtectTools.</p>
System Software Manager (free - Windows XP only)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image; No recovery CDs will ship with Linux - an ISO image will be available on an HD partition.
Asset Tag	<ul style="list-style-type: none"> • Repository for storing company-specific property asset numbers for easy tracking • Initially set equal to the system serial number • Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard Drive Serial Number, Model, and Manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager Software - Windows XP only)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Protocol-level Integrity Monitoring (CRC checking)	<p>A feature of SATA and SAS, Cyclic Redundancy Checking provides command, data and message transfer verification and proactive notification of problems with recommendations for enhancing system performance. It detects all the following errors types:</p> <ul style="list-style-type: none"> • single bit errors • double bit errors • an odd number of errors • error bursts up to 32-Bits long

Technical Specifications

Drive Self Tests (DPS)	<ul style="list-style-type: none"> • Drive Protection System • A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. • Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced. <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures. DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-monitoring, analysis and reporting technology – Windows XP only)	<p>Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count. By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure.</p> <p>SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation</p>

Serviceability Features of System	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Chassis fan removal	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less
CPUs	Requires T15 Torx driver, can be upgraded without removing any internal components except processor heat sink.
Power supply diagnostic LED	Yes, dual function: AC OK & power OK
Power Button	Yes, ACPI multi-function
Power LED	Yes, dual color LED indicates normal operation and faults.
Hard drive activity LED	Yes
Internal speaker	Yes, used for pre-boot diagnostic beep codes
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes

Technical Specifications

Over-Temp Warning on Screen (Requires IM Agents)	Yes
OS CD (Restore OS CD)	Restores computer to its original factory shipping image; No recovery CDs will ship with Linux - an ISO image will be available on an HD partition.
Restore CD	Restores the computer to its original factory shipping image
Flash ROM	Yes
3.3V Aux Power LED on System PCA	No
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	No
Diagnostic Power Switch LED on board	No
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes
NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

Security Features	
112 Trusted Platform Module Chip with optional ProtectTools Software	Enables layered security management
Access Panel Key Lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	May prevent entire system theft; Kensington locks to tether systems to the desk. 3mm x 7mm slot at rear of system.
HP Solenoid Hood Lock/Sensor Kit (optional)	The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed.
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.

Technical Specifications

Service and Support	On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 24 x 7. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Eco-Label Certifications & Declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:
	<ul style="list-style-type: none"> ● US Energy 3.0 Star (Not in Linux) ● US Federal Energy Management Program (FEMP) ● China Energy Conservation Program ● IT ECO declaration ● Japan PC Green label*
	*NOTE: This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'

Energy Consumption		
Example Configuration #1	Processor Info	2x2.66GHz Intel Xeon 5100 sequence dual-core processors
	Memory Info	2x1GB 667MHz
	Graphics Info	FX1500
	Disks/Optical/Floppy	2x80GB SATA / 2 Optical / 1 Floppy

Energy Consumption		115 VAC		230 VAC		100 VAC	
	LAN	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
	Windows Idle (S0)	143W		141W		144W	
	Windows Busy Typ (S0)	244W		238W		245W	
	Windows Busy Max (S0)	308W		306W		314W	
	Sleep (S3)	5.1W	4.3W	5.4W	4.7W	5.1W	4.5W
	Off (S5)	2.6W	1.6W	2.6W	1.9W	2.3W	1.6W

Technical Specifications

Heat Dissipation**	115 VAC		230 VAC		100 VAC		
	LAN	Enabled	Disabled	Enabled	Disabled	Enabled	Disabled
Windows Idle (S0)		488W		481W		491W	
Windows Busy Typ (S0)		832W		812W		836W	
Windows Busy Max (S0)		1051W		1046W		1070W	
Sleep (S3)	17.4 btu/hr	14.7 btu/hr	18.4 btu/hr	16.1 btu/hr	17.4 btu/hr	15.4 btu/hr	
Off (S5)	8.9 btu/hr	5.5 btu/hr	8.9 btu/hr	6.5 btu/hr	7.8 btu/hr	5.5 btu/hr	
NOTES:							
* Energy Star low energy mode							
** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.							
This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.							

Declared Noise Emissions (High and entry level configurations)			
System Configuration (Entry-level)	The entry-level configuration used for the Declared Noise Emissions for the Mini tower Desktop model is based on a "Typically Configured Desktop"		
	Processor Info	2x 2.00 GHz Woodcrest Intel Xeon 5130 Sequence	
	Disks/Optical/Floppy	1x 80 GB SATA / 1 DVD-ROM / 1 Floppy	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWad, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	4.1 Bels	24 dB
	SATA Hard drive Operating (random reads - 30.3 reads/sec)	4.1 Bels	25 dB
	Floppy Drive Operating (continuous copy)	4.8 Bels	34 dB
	DVD-ROM Operating (sequential reads)	5.0 Bels	34 dB
System Configuration (High-end)	The high-end configuration used for the Declared Noise Emissions for the Mini tower Desktop model is based on a "Typically Configured Desktop"		
	Processor Info	2x 3.00 GHz Woodcrest Intel Xeon 5160 Sequence	
	Graphics Info	Quadro FX 3500 with active heatsink	
	Disks/Optical/Floppy	1x 73 GB 15K rpm SAS / 1 DVD-ROM / 1 Floppy	
Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWad, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	4.1 Bels	25 dB
	SATA Hard drive Operating (random reads - 80 reads/sec)	5.2 Bels	33 dB
	Floppy Drive Operating (continuous copy)	4.9 Bels	33 dB
	DVD-ROM Operating (sequential reads)	5.0 Bels	35 dB

Technical Specifications

Longevity and Upgrading	<p>This product is designed to be upgraded, possibly extending its useful life by several years. Spare parts are available throughout the warranty period and for up to 5 years after the end of production. Upgradeability features contained in the product include:</p> <ul style="list-style-type: none"> ● Intel LGA771 processor socket ● 8 USB ports ● 2 PCI slots and 4 PCI Express slots ● 5 storage bays ● 4 memory slots
--------------------------------	--

Batteries	<p>This product complies with ISO standards:</p> <ul style="list-style-type: none"> ● EU Directive 91/ 157/ EEC ● EU Directive 93/ 86/ EEC ● EU Directive 98/ 101/ EEC <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> ● Mercury greater the 5ppm by weight ● Cadmium greater than 10ppm by weight ● Lead greater than 4000ppm by weight. <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>
------------------	---

Additional Information	<ul style="list-style-type: none"> ● This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC. ● This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. ● Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. ● This product contains 0% recycled materials (by wt.) ● This product is >90% recycle-able when properly disposed of at end of life. 	
Packaging Materials		
External	Cardboard carton and insert	2.70 kg
Internal	LDPE Foam	0.35 kg

Technical Specifications

Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none">● Asbestos● Certain Azo Colorants● Certain Brominated Flame Retardants – may not be used as flame retardants in plastics● Cadmium● Chlorinated Hydrocarbons● Chlorinated Paraffins● Formaldehyde● Halogenated Diphenyl Methanes● Lead carbonates and sulfates● Lead and Lead compounds● Mercuric Oxide Batteries● Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.● Ozone Depleting Substances● Polybrominated Biphenyls (PBBs)● Polybrominated Diphenyl Ethers (PBDEs)● Polybrominated Biphenyl Oxides (PBBOs)● Polychlorinated Biphenyl (PCB)● Polychlorinated Terphenyls (PCT)● Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.● Radioactive Substances● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging	<p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none">● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.● Design packaging materials for ease of disassembly.● Maximize the use of post-consumer recycled content materials in packaging materials.● Use readily recyclable packaging materials such as paper and corrugated materials.● Reduce size and weight of packages to improve transportation fuel efficiency.● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-Of-Life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>

Technical Specifications

Hewlett-Packard Corporate Environmental Information	For more information about HP's commitment to the environment: [link to new HP white paper now in progress] Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html
--	---

Technical Specifications - Audio

High Definition Integrated Realtek ALC262 Audio	Type	Integrated
	High Definition Codec	Yes
	SPDIF	No
	External audio jacks	One front stereo analog microphone-in One front stereo headphone-out One rear line-in One rear line-out One rear stereo analog microphone-in
	Internal audio connectors	AUX-IN line-level analog input
	Retasking	NOTE: All external audio ports are retaskable as Line-In, Line-Out, Microphone-In, or Headphone-Out
	Sampling	44.1kHz/48 kHz/96kHz/192kHz (output only)
	Wavetable syntheses (software)	Yes - Uses OS soft wavetable
	Digital audio	Yes
	Analog audio	Yes
	Number of channels on Line-Out (mono/stereo)	Two independent stereo outputs (Left & Right channels)
	Internal audio speaker power rating	1.5 W
	Internal speaker	Yes
	Microphone features	Stereo Microphone supporting: Acoustic echo cancellation Noise suppression Beam forming
<hr/>		
Sound Blaster X-Fi XtremeMusic Audio Card (Windows XP Only)	Audio Quality	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%
	Signal to Noise Ratio (SNR)	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted) <ul style="list-style-type: none"> ● Stereo Output: 109dB ● Front and Rear Channels: 109dB ● Centre, Subwoofer and Side Channels: 109dB
	Sound Conversion	24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate 24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output 24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output
	Recording/Sampling Rate	44.1, 48 and 96kHz
	ASIO 2.0 support	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring

Technical Specifications - Audio

Enhanced SoundFont support	up to 24-bit resolution 24-bit/96kHz
DACs	24-bit/192kHz
Voice Support	128 voices
Max. Channels in 3D Positional Audio	7.1
EAX® ADVANCED HD™ 5.0 support	Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™
Connectors	FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack Line level out (Front / Rear / Centre / Subwoofer / Rear Centre) via 3.50 mm minijacks AUX_IN line-level analog input via 4-pin Molex connector on card One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)
Dimensions	7.25 x 5 x 0.9 inches; 18.42 x 12.7 x 2.29 cm
Additional product features	Movies THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback Music X-Fi 24-bit Crystalizer CMSS-3D SuperRip Audio Creation Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI Gaming EAX ADVANCED HD 5.0 Software Bundle Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Centre Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel

Technical Specifications - Audio

Minimum System Requirements

System RAM
Hard Disk

Operating System

WaveStudio
Console Launcher
Creative Media Toolbox
Creative Diagnostics
256 MB
600MB free space
Available PCI 2.1 slot for the audio card
CD-ROM/CD-RW or CD/DVD-ROM required for software installation
Microsoft Windows XP Service Pack 2 (SP2)

Technical Specifications - Communications

Broadcom BCM5752 NetXtreme Gigabit Ethernet LOM (PCIe)	Connector	RJ-45
	Controller	Broadcom 5752 PCI-E LAN Controller
	Memory	Integrated 64KB receive buffer and 8KB transmit buffer
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCIe 1.0a
	Data path width	X1
	Data path speed	2.5Gbit per sec per direction transfer rate
	Data transfer mode	Bus-master DMA
	Hardware certifications	
	Power requirement	1.5 watts @ +3.3V AUX supply
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
	Operating system driver support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 3
	Management capabilities	WOL, PXE
	Alerting	ASF 2.0

Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)	Connector	RJ-45
	Controller	Broadcom 5751 PCI-E 1.0a LAN Controller
	Memory	Integrated 96Kb frame buffer memory
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data path width	X1
	Data path speed	2.5Gbit per sec per direction transfer rate
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia
	Power requirement	3.1 watts @ +3.3V AUX supply
Boot ROM support	Yes	

Technical Specifications - Communications

Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
Environmental	Operating temperature 32° to 131° F (0° to 55° C) Operating humidity 85% at 131° F (55° C)
Dimensions	4.4 x 2.2 x 0.08 inches; 11.2 x 5.5 x 0.2 cm
Operating system driver support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3
Management capabilities	WOL, PXE , Remote cable management
Alerting	ASF 2.0
Kit contents	Broadcom 5751, CD, Broadcom 5751 Netxtreme Gigabit PCIe NIC, drivers, quick install guide, product warranty statement

Technical Specifications - Controllers

LSI SAS3041E Serial Attach SCSI (SAS) Host Bus Adapter (HBA)	PCI Bus	PCI-Express x4 lanes	
	PCI Modes	Bus Master DMA	
	PCI data burst transfer rate	1.0 GBps (half duplex) 2.0 GBps (full duplex)	
	SAS Bandwidths	Half Duplex Single lane – 300 MBps Wide Port (2 lanes) – 600 MBps Wide Port (4 lanes) – 1200 MBps	Full Duplex Single SAS Lane – 600 MBps Wide Port (2 lanes) – 1200 MBps Wide Port (4 lanes) – 2400 MBps
	PCI Card Type	3.3 volt add-in card	
	PCI Voltage	12 V ± 10%	
	PCI Form Factor	6.6" x 2.731" (Low-profile)	
	PCI Power	7.5 Watts	
	Bracket	Full height and Low-profile	
	Certification Level	PCI-Express 1.0a	
	IO Bus	Four 3Gbps SAS / 1.5Gps SATA ports	
	SAS Processor	LSISAS1064E	
	Internal Connectors	Four- SATA x1 connectors	
	External Connectors	None	
	Max. Number of SCSI Devices	128	
	LED Indicators	On-board activity and fault LEDs	
	Integrated Mirroring	Integrated Mirroring option available	
	Environments	Operating	Storage
	Temperature	32° to 140° F (0° to 60° C)	-49° to +221° F (-45° to +105° C)
	Relative Humidity	5% to 90% non-condensing	5% to 90% non-condensing
	MTBF	>200,000 hours	
	Compliances	EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04);Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950	
	Operating system support	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional, XP Professional x64, Red Hat Enterprise Linux 4 & 5 Desktop	
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.	

Technical Specifications - Controllers

LSI SAS 8344ELP 3Gb/s RAID Controller	PCI Bus	PCI-Express x4 lanes		
	PCI Modes	Bus Master DMA		
	RAID Levels	0, 1, 5, 10 and 50		
	PCI data burst transfer rate	1.0 GBps (half duplex) 2.0 GBps (full duplex)		
	SAS Bandwidths	Half Duplex		Full Duplex
		Single lane - 300 MBps		Single SAS Lane - 600 MBps
		Wide Port (2 lanes) - 600 MBps		Wide Port (2 lanes) -1200 MBps
		Wide Port (4 lanes) - 1200 MBps		Wide Port (4 lanes) - 2400 MBps
	PCI Card Type	3.3 volt add-in card		
	PCI Voltage	12 V ± 10%		
	PCI Form Factor	6.6" x 2.731" (Low-profile)		
	PCI Power	7.5 Watts		
	Bracket	Full height and Low-profile		
	Certification Level	PCI-Express 1.0a		
	IO Bus	Eight 3Gbps SAS/SATA ports		
	SAS Processor	Intel IOP333 I/O Processor		
	Internal Connectors	One SAS SFF8087 x4 internal connector		
	External Connectors	One SAS SFF8470 x4 external connector		
	Max. Number of SAS Devices	32		
	LED Indicators	On-board activity and fault LEDs		
	Integrated Mirroring	Integrated Mirroring option available		
	Environments	Operating		Storage
Temperature	0 to 60 C		-45 to +105 C	
Relative Humidity	5 to 90% non-condensing		5 to 90% non-condensing	
MTBF	>200,000 hours			
Compliances	EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04);Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Safety: EN60950			
Operating system support	Microsoft® Windows® XP Professional, XP Professional x64 Red Hat Linux WS3 and WS4			
Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.			

* Due to the placement of the I/O controller engine on the SAS 8344ELP, external cables from the SAS 8344ELP RAID controller to the storage enclosure may not be longer than two meters; this card also does not support the use of external fan-out cables. See http://h20000.www2.hp.com/bizsupport/TechSupport/Document.jsp?lang=en&cc=us&objectID=c00817918&jumpid=reg_R1002_USEN for additional information

Technical Specifications - Hard Drives

Serial ATA Hard Drives	750 GB (7,200 rpm)	Capacity	750,156,374,016 bytes	
		Height	1 inches; 2.54 cm	
		Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
		Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
		Synchronous Transfer Rate (Maximum)	Up to 3.0 Gb/s	
		Cache	16 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.8 ms
			Average	14.0 ms
			Full-Stroke	20 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	1,465,149,168	
		Operating Temperature	41° to 131°F (5° to 55°C)	

	500 GB (7,200 rpm)	Capacity	500,107,862,016 bytes	
		Height	1 inches; 2.54 cm	
		Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
		Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
		Synchronous Transfer Rate (Maximum)	Up to 3.0 Gb/s	
		Cache	16 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.3 ms
			Average	20.0 ms
			Full-Stroke	30 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	976,773,168	
		Operating Temperature	41° to 131°F (5° to 55°C)	

Technical Specifications - Hard Drives

250 GB (7,200 rpm)	Capacity	250,059,350,016 bytes	
	Height	1 inches; 2.54 cm	
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	Interface	Serial ATA (3.0 Gb/s) Native Command Queuing enabled (Model EA788AA only)	
	Synchronous Transfer Rate (Maximum)	Up to 3.0 Gb/s	
	Cache	With NCQ (Model EA788AA): 16 MB Without NCQ (Model PY278AA): 8MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
		Average	18.5 ms
		Full-Stroke	18 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	41° to 131°F (5° to 55°C)	

160 GB (7,200 rpm)	Capacity	160,041,885,696 bytes	
	Height	1 inches; 2.54 cm	
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	Cache	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.9 ms
		Average	9.3 ms
		Full-Stroke	18 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	41° to 131°F (5° to 55°C)	

Technical Specifications - Hard Drives

80 GB (7,200 rpm)	Capacity	80,026,361,856 bytes	
	Height	1 inches; 2.54 cm	
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Cache	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
		Average	9.3 ms
		Full-Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 131°F (5° to 55°C)	
	<hr/>		
160 GB (10k rpm)	Capacity	160,041,885,696 bytes	
	Height	1 inches; 2.54 cm	
	Width	Media diameter: 3.5 inches; 8.89 cm Physical size: 4 inches; 10.2 cm	
	Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 1.5 Gb/s	
	Cache	16 Mbytes	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms
		Average	4.6 ms
		Full-Stroke	10.2 ms
	Rotational Speed	10,000 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	41° to 131°F (5° to 55°C)	

Technical Specifications - Hard Drives

80 GB (10k rpm)	Capacity	80,026,361,856 bytes
	Height	1 inches; 2.54 cm
	Width	Media diameter: 3.0 inches; 7.62 cm Physical size: 4 inches; 10.2 cm
	Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled
	Synchronous Transfer Rate (Maximum)	Up to 1.5 Gb/s
	Cache	16 Mbytes
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.3 ms Average 4.6 ms Full-Stroke 10.2 ms
	Rotational Speed	10,000 rpm
	Logical Blocks	156,301,488
	Operating Temperature	41° to 131°F (5° to 55°C)

Serial Attached SCSI (SAS) 300 GB Hard Drives (15K rpm)	Capacity	300,000,000,000 bytes
	Height	1.0 in (25.4mm)
	Width	4.0 in (101.6mm)
	Interface	SAS
	Synchronous Transfer Rate (Maximum)	3.0 Gb/s
	Buffer	16 MB
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.2 ms Average 3.5 ms Full-Stroke 6.7 ms
	Rotational Speed	15,000 rpm
	Logical Blocks	585,937,500 - 512 byte blocks
	Operating Temperature	50° to 95° F (10° to 35° C)

300 GB (10K rpm)	Capacity	300,000,000,000 bytes
	Height	1.0 in (25.4mm)
	Width	4.0 in (101.6mm)
	Interface	SAS
	Synchronous Transfer Rate (Maximum)	3.0 Gb/s
	Buffer	16 MB

Technical Specifications - Hard Drives

Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec
	Average	<4.5 msec
	Full-Stroke	<11.0 msec
Rotational Speed	10,000 rpm	
Logical Blocks	585,937,500 - 512 byte blocks	
Operating Temperature	50° to 95° F (10° to 35° C)	

146 GB (10K rpm)	Capacity	146,815,737,856 bytes	
	Height	1.0 in (25.4mm)	
	Width	4.0 in (101.6mm)	
	Interface	SAS	
	Synchronous Transfer Rate (Maximum)	3.0 Gb/s	
	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec
		Average	<4.5 msec
		Full-Stroke	<11.0 msec
	Rotational Speed	10,000 rpm	
Logical Blocks	286,749,488 - 512 byte blocks		
Operating Temperature	50° to 95° F (10° to 35° C)		

73 GB (15K rpm)	Capacity	73,407,865,856 bytes	
	Height	1.0 in (2.54 cm)	
	Width	4.0 in (101.6mm)	
	Interface	SAS	
	Synchronous Transfer Rate (Maximum)	3.0 Gb/s	
	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.2 ms
		Average	3.5 ms
		Full-Stroke	7.4 ms
	Rotational Speed	15,000 rpm	
Logical Blocks	143,374,738 - 512 byte blocks		
Operating Temperature	50° to 95° F (10° to 35° C)		

146 GB (15K rpm)	Capacity	146,815,737,856 bytes
	Height	1.0 in (25.4mm)

Technical Specifications - Hard Drives

Width	4.0 in (101.6mm)
Interface	SAS
Synchronous Transfer Rate (Maximum)	3.0 Gb/s
Buffer	16 MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.2 ms Average 3.5 ms Full-Stroke 7.4 ms
Rotational Speed	15,000 rpm
Logical Blocks	286,749,488 - 512 byte blocks
Operating Temperature	50° to 95° F (10° to 35° C)

Technical Specifications - Removable Storage

HP USB 2.0 Disk on Key	Dimensions (HxWxD)	0.9 x 0.7 x 3.9 inches; 2.3 x 1.8 x 9.8 cm
	Weight	0.05 lb (0.02 kg)
	USB Specification	2.0
	Transfer Rate	Read-1023 KB/Sec; Write-850 KB/Sec
	Storage Media	Solid state flash memory, no moving parts
	Power Supply	USB Bus-powered, no external power required
	Capacity	512 MB or 1 GB

Technical Specifications - Input/Output Devices

HP IEEE 1394a FireWire 400 3-Port PCI Card	Device Interface Protocol	IEEE-1394a	
	Data Rate	400 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	PCI card with brackets for low profile and full height PCI slots.	
	Environmental	Operating temperature	50° to 131° F (10° to 55° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Relative humidity	20% to 80%
	Ports	Two IEEE1394 6-Pin Connector (Rear)	
	Minimum System Requirements	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium II 266 or faster 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system Available PCI slot	
	Regulatory Agency Approval	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC	

HP IEEE 1394b FireWire 800 3-Port PCI Card (Windows XP Only)	Device Interface Protocol	IEEE-1394	
	Data Rate	800 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	PCI card with brackets for low profile and full height PCI slots.	
	Environmental	Operating temperature	50° to 131° F (10° to 55° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Relative humidity	20% to 80%
	Ports	Two IEEE-1394b bilingual 9-Pin Connector (Rear)	
	Connectors	One 10-Pin header Custom Connector (Internal)	
	Minimum System Requirements	Microsoft Windows XP Professional, Windows XP Home, not supported on Linux Pentium III 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system	

Technical Specifications - Input/Output Devices

	Regulatory Agency Approval	Available PCI slot FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
PS/2 OR USB Standard Keyboard	Physical characteristics	Keys 104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H) 18.0 x 6.4 x 0.98 inches; 45.8 x 16.3 x 2.5 cm
	Electrical	Weight 2 lb (0.9 kg) minimum
		Operating voltage + 5VDC \pm 5%
	Mechanical	Power consumption 50-mA maximum (with three LEDs ON)
		ESD CE level 4, 15-kV air discharge
	Environmental	EMI - RFI Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 - 2001 Functionally compliant
	Approvals	Languages 38 available
		Keycaps Low-profile design
	Ergonomic compliance	Switch actuation 55-g nominal peak force with tactile feedback
		Switch life 20 million keystrokes (using Hasco modified tester)
	Approvals	Switch type Contamination-resistant switch membrane
		Key-leveling mechanisms For all double-wide and greater-length keys
	Ergonomic compliance	Cable length 6 ft (1.8 m)
		Microsoft PC 99 - 2001 Mechanically compliant
	Approvals	Acoustics 43-dBA maximum sound pressure level
		Operating temperature 50° to 122° F (10° to 50° C)
	Approvals	Non-operating temperature -22° to 140° F (-30° to 60° C)
		Operating humidity 10% to 90% (non-condensing at ambient)
	Approvals	Non-operating humidity 20% to 80% (non-condensing at ambient)
		Operating shock 40 g, six surfaces
	Approvals	Non-operating shock 80 g, six surfaces
		Operating vibration 2-g peak acceleration
	Approvals	Non-operating vibration 4-g peak acceleration
		Drop (out of box) 26 inches; 66 cm on carpet, six-drop sequence
	Approvals	Drop (in box) 42 inches; 107 cm on concrete, 16-drop sequence
		Operating system support Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS

Technical Specifications - Input/Output Devices

Kit contents Keyboard, keyboard software media, installation guide, warranty card, safety and comfort

HP PS/2 Scroll Mouse	Dimensions	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)		
	Weight	4.44 oz (126 g)		
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)	
		Non-operating temperature	-22° to 140° F (-30° to 60° C)	
		Operating humidity	10% to 90% (non-condensing at ambient)	
		Non-operating humidity	20% to 80% (non-condensing at ambient)	
		Operating shock	40 g, 6 surfaces	
		Non-operating shock	80 g, 6 surfaces	
		Operating vibration	2 g peak acceleration	
		Non-operating vibration	4 g peak acceleration	
		Drop (out-of-box)	26 inches; 66 cm on carpet, 6-drop sequence	
		Drop (out-of-box)	1 m on asphalt tile over concrete, 6-drop sequence	
		Electrical	Operating voltage	5 VDC ± 10%
			Power consumption	15 mA
			System consumption	PS/2 mini-din connector
	ESD		CE level 4, 15 kV air discharge	
	EMI-RFI		Conforms to FCC rules for a Class B computing device	
	Microsoft PC99 - 2001		Functionally compliant	
	Mechanical	Resolution	400 ± 20% DPI	
Tracking speed		10 in/s maximum		
Acceleration		100 in/s		
Switch actuation		65 g nominal peak force		
Switch life		1,000,000 operations (using Hasco modified tester)		
Switch type		Low force micro-switches		
Tracking mechanism life		155 mi (250 km) at average speed of 10 in/s		
Cable length		6 ft (1.8 m)		
Microsoft PC99 - 2001		Mechanically compliant		
Scroll wheel		Width	8 mm	
	Diameter	0.99 inches; 25.2 mm		
	Maximum rotation speed	30 mm/s		
	Switch type	Light force micro-switch		
	Switch life	1 million operations		

Technical Specifications - Input/Output Devices

	Mechanical life	Minimum 200,000 revolutions
Regulatory approvals	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
Compatibility	Operating system support	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

HP 2-button Optical Scroll Mouse (USB)

Dimensions (H x L x W)	1.5 x 4.5 x 2.5 inches; 3.8 x 11.6 x 6.3 cm
Weight	0.27 lb (0.12 kg)
Cable length	72.8 inches; 185 cm
System requirements	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

HP Optical 3-Button Mouse (USB)

Dimensions/Weight	Height	1.5 inches; 3.76 cm
	Length	4.5 inches; 11.56 cm
	Width	2.4 inches; 6.19 cm
	Weight	3.80 oz (108 g)
Environmental	Operating temperature	32° to 104° F (0° to 40° C)
	Non-operating temperature	-4° to 140° F (-20° to 60° C)
	Operating humidity	10% to 90% (non condensing at ambient)
Mechanical	Tracking speed	6 in/s Maximum
	Switch life	3,000,000 operations
	Switch type	Micro-switches
	Tracking mechanism life	155 miles (250 km) at average speed of 10 in/s
	Cable length	9.5 ft (2.9 m)
	System requirements	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

Technical Specifications - Input/Output Devices

HP SpacePilot 3D USB Intelligent Controller (model EF390AA)	Physical Characteristics	Dimensions (L x W x H)	9.3 x 5.6 x 2.0 inches; 236 x 143 x 53 mm
		Weight	1.875 lb (0.85 kg)
	Mechanical	Palmrest	Sculpted
		Buttons	21+ programmable speed keys 15 reprogrammable
		LCD Viewing Area	(W x H) 4.1 x 1.2 inches; 102 x 30 mm
	System Requirements	Active Area	(W x H) 3.9 x 1.0 inches; 98 x 26 mm
		Display Format	240 x 64
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		Device Sensitivity	Adjustable to preference
	Operating System Supported	Intel Pentium 4 or AMD Athlon processor based system 20 megabytes free disk space for driver and plug-in installation (CD-ROM device required) USB 1.1 or 2.0	
Regulatory Approvals	Microsoft Windows 2000 and XP FCC, CE		

HP SpaceExplorer (USB - Windows Only)	Physical Characteristics	Dimensions (L x W x H)	7.6 x 5.4 x 2.3 in (194 x 139 x 58mm)
		Weight	1.36 lbs (0.62 kg)
	Mechanical	Palmrest	Sculpted
		Buttons	15 reprogrammable speed keys
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
	System Requirements	Device Sensitivity	Adjustable to preference
		USB 1.1 or 2.0	
	Operating System Supported	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP, not supported in Linux	
	Regulatory Approvals	FCC, CE	

Technical Specifications - Optical Devices

HP 16X/48X DVD-ROM Drive	Height	5.25", half-height, tray load	
	Interface Type	ATAPI/EIDE	
	Dimensions (W x H x D)	5.88 x 1.71 x 7.87 [max] inches; 149.5 x 43.25 x 200.0 [max] mm (external, excluding bezel)	
	Disc Formats	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW	
	Disc Capacity	DVD-ROM	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
		CD-ROM	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
	Access Times (typical reads, including settling)	DVD-ROM Single Layer	120 ms
		CD-ROM Mode 1	90 ms
		Full Stroke DVD	240 ms (seek)
		Full Stroke CD	160 ms (seek)
		Startup Time	< 10 seconds (typical)
		Stop Time	< 4 seconds
		Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
	Maximum Data Transfer Rates	CD-ROM Read	6000 KB/s (40X) Max
		DVD-ROM Read	21,600 KB/s (16X) Max
		Digital Audio Extraction	6000 KB/s (40X) Max
	Power	Source	Four-pin, DC power receptacle
		DC Power Requirement	5 VDC \pm 5% – 100 mV ripple p-p 12 VDC \pm 5% – 200 mV ripple p-p
		DC Current	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
	Audio Output	Line-Out	0.7 VRMS
		Signal-to-Noise Ratio	85 dB
		Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes		
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon		

Technical Specifications - Optical Devices

Operating Environmental (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)
	Relative Humidity (operating)	10% to 85%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)
Certifications, Approvals	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
Operating Systems Supported	Microsoft Windows 2000, Windows XP Professional	
Kit Contents	16X/48X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	

HP 48X Max SATA CD-RW/DVD-ROM Combo Drive

Form Factor	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA/ATAPI	
Disc capacity	Single layer: Up to 4.7 GB (6 times capacity of CD-ROM) Double layer: Up to 8.5 GB (12 times capacity of CD-ROM)	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
Weight (max)	2.6 lb (1.2 kg)	
Write speed	CD-R	Up to 48X
	CD-RW	Up to 32X
Read speeds	DVD+R/-R/+RW/-RW/+R DL /-R DL	Up to 8X
	DVD-ROM	Up to 16X
	CD-ROM, CD-R	Up to 48X
	CD-RW	Up to 32X
Buffer Size	1.5MB (Min)	
Access times (typical reads, including setting)	Random	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	Full Stroke	DVD: < 250 ms (seek), CD: < 210 ms (seek)
Power	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	Total Drive Power (standby mode)	< 2.5 Watt

Technical Specifications - Optical Devices

Environmental (all conditions non-condensing)	Temperature (operating) 41° to 122° F (5° to 50° C) Relative Humidity (operating) 10% to 90% Maximum Wet Bulb Temperature (operating) 86° F (30° C)
Operating Systems Supported	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system.
Option kit contents	HP 48X Max SATA CD-RW/DVD-ROM Combo Drive, Roxio Easy Media Creator version 9, Intervideo WinDVD, CD-R media, high-speed CD-RW media, and installation guide.

HP 16X Max SATA DVD+/-RW LightScribe Drive	Form Factor	5.25-inch, half-height, tray-load	
	Orientation	Either horizontal or vertical	
	Interface type	SATA/ATAPI	
	Disc capacity	8.5 GB DL or 4.7 GB standard	
	Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	Weight (max)	2.6 lb (1.2 kg)	
	Write speed	DVD+R	Up to 16X
		DVD+RW	Up to 8X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 4X
		DVD-R	Up to 16X
		DVD-RW	Up to 6X
		DVD-RAM	Up to 12X
		CD-R	Up to 48X
		CD-RW	Up to 32X
		Read speeds	DVD-RAM
	DVD+RW, DVD-RW, DVD+R DL, DVD-R DL		Up to 8X
DVD-ROM, DVD+R, DVD-R	Up to 16X		
CD-ROM, CD-R	Up to 48X		
CD-RW	Up to 32X		
Access times (typical reads, including setting)	Random		DVD: < 130 ms (typical), CD: < 120 ms (typical)
	Full Stroke	DVD: < 240 ms (seek), CD: < 200 ms (seek)	
Power	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p	

Technical Specifications - Optical Devices

	DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	Total Drive Power (standby mode)	< 2.5 Watt
Environmental (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)
	Relative Humidity (operating)	10% to 90%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)
Operating Systems Supported	Microsoft Windows Vista Business 32 or 64, Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 4 & 5 Desktop No driver is required for this device. Native support is provided by the operating system.	
	<p>* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit http://www.windowsvista.com/upgradeadvisor. For Windows Vista system requirements, visit http://www.windowsvista.com/systemrequirements.</p>	
Option kit contents	HP 16X DVD+-RW SuperMulti LightScribe drive, LightScribe software, Roxio Easy Media Creator version 9, Intervideo WinDVD Software, installation guide, and DVD+R media. Software is Microsoft Windows only.	

Technical Specifications - Graphics

NVIDIA Quadro NVS 285 128MB PCIe Dual Display	Form Factor	Nvidia Quadro NVS 285 128MB PCIe Dual Display Low profile, both ATX and low profile brackets included
	Graphics Controller	Integrated Quadro 285 2D graphics processor unit (GPU)
	Bus Type	PCI-Express
	Memory	128 MB DDR2
	Connectors	Single high-density DMS-59 Flex Connector
	Dimensions	Low-profile, 2.586 x 6.6 inches; 6.57 x 16.76 cm
	Multi-monitor support	Dual analog or digital monitors
	RAMDAC	Dual 350 MHz (integrated)
	Maximum pixel clock	350 MHz
	Overlay planes	One 16-bit Video overlay plane
	High-definition Video Processor (HDVP)	Full screen, full frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware colour controls for video overlay Hardware colour-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Available graphics drivers	Microsoft Windows Vista Business 32 and 64, Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://www.hp.com/country/us/en/support.html?pageDisplay=drivers
	Option kit Contents	NVIDIA Quadro NVS 285 128MB PCIe Graphics Card with full height bracket attached, DMS 59 to dual DVI Y cable, DMS 59 to dual VGA Y cable, low profile bracket, Workstation Software Driver CD, Desktop Software Driver CD, documentation.

Technical Specifications - Graphics

NVIDIA Quadro NVS 440 256 MB Graphics Controller	Form Factor	ATX
	Graphics Controller	2 nv43 2D graphics processor units (GPUs)
	VGA controller	Integrated into the Quadro GPU
	Bus Type	PCI-E x16
	RAMDAC	Dual 350 MHz
	Memory	256 MB DDR frame buffer and Texture storage (128MB per GPU)
	Connector	Two DMS-59
	Controller clock speed	250 MHz
	Colour planes	32-bit colour buffer
	Overlay planes	1 16-bit Video overlay plane
	Maximum pixel clock	350 MHz
	Multi-Monitor Support	Up to 4 analog or digital monitors
	Single DVI Support	Yes
	Dual DVI Support	Yes
	High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware colour controls for video overlay Hardware colour-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
Available graphics drivers	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .	

NVIDIA Quadro FX 1500 PCI-Express graphics controller	Form Factor	ATX
	Graphics Controller	NVIDIA NV71GL
	Bus Type	PCI Express x16
	Memory	256MB GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 dual-link DVI-I + 9-pin HDTV output
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). HD-Out component Mode: YPrPB - SMPTE 1080i, 720p, 480p, 576p or composite Mode: NTSC/PAL 480i, 576i NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	RAMDAC	Dual 400MHz integrated
	Architecture features	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit colour precision

Technical Specifications - Graphics

	12-bit sub-pixel precision
	8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm
	Hardware accelerated anti-aliased points and lines
	Hardware OpenGL overlay planes
	Hardware accelerated two-sided lighting
	Hardware accelerated clipping planes
	3rd generation occlusion culling
	3D volumetric texture support
	Quad-buffered stereo
	Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)
Shading architecture	Fully programmable GPU
	Long fragment programs (unlimited instructions)
	Long vertex programs (unlimited instructions)
	Looping and subroutines (up to 256 loops per vertex program)
	Dynamic flow control
	Conditional execution
Supported graphics APIs	OpenGL 2.0
	DirectX 9.0
Available graphics drivers	Microsoft Windows Vista 32 and 64, Microsoft Windows Vista 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

ATI FireGL™ V3350 (Part# RV705AA)	Form factor	ATX
	Graphics controller	RV515
	Bus type	PCI-Express x16
	Memory	256 MB DDR unified frame buffer, Z-buffer and Texture storage
	Connectors	Dual DVI-I analog/digital, dual VGA analog support with DVI-to-VGA adapters.
	Display resolution support	Analog support for 2048x1536 @ 85Hz on each output connector. Digital support for 1920x1200 @ 60Hz on each output connector.
	RAMDAC	Dual 10-bit per channel 400MHz
	Architecture features	<ul style="list-style-type: none">• 2x/4x/6x Anti-aliasing modes; multi-sample algorithm with gamma correction, programmable sparse sample patterns, and centroid sampling• 2x/4x/8x/16x Anisotropic Filtering modes; up to 128-tap texture filtering• High resolution texture support (up to 4K x 4K)• Hardware supported overlays, anti-aliased points and lines, 2 sided lighting, occlusion culling
	Avivo video and display platform	<ul style="list-style-type: none">• 64-bit per pixel floating point HDR supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing• 32-bit integer HDR (10:10:10:2) format supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing
	Programmable video processor	<ul style="list-style-type: none">• Accelerated MPEG-2, MPEG-4, DivX, WMV9, VC-1 and H.264 decoding and transcoding• Seamless pixel shader integration with video in real-time

Technical Specifications - Graphics

Display output

- 16-bit per channel floating point HDR and 10 bit per channel DVI output
- Programmable piecewise linear gamma correction, colour correction, and colour space conversion (10-bits per colour)
- Complete independent colour controls and video overlays for each display
- High quality pre- and post-scaling engines with underscan support for all outputs
- Content-adaptive de-flicker filtering for interlaced displays
- Spatial/temporal dithering enables 10-bit colour quality on 8 and 6-bit displays
- VGA mode support on all outputs

Shading architecture

- Supports Microsoft DirectX 9.0 Shader Model 3.0 programmable vertex and pixel shaders in hardware
- Full speed 128-bit floating point processing for all shader operations
- Dedicated branch-execution units for high performance dynamic branching and flow control
- Dedicated texture address units for improved efficiency
- Up to 128 simultaneous pixel threads
- Multiple Render Target (MRT) support
- Render to vertex buffer support

Supported graphics APIs OpenGL 2.0
DirectX 9.0

Available graphics drivers Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site:
http://welcome.hp.com/country/us/eng/software_drivers.html.
HP-tested Windows XP and Linux

**NVIDIA Quadro FX 1500
PCI-Express graphics
controller****Form Factor**

ATX

Graphics Controller

NVIDIA NV71GL

Bus Type

PCI Express x16

Memory

256MB GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage

Connectors

2 dual-link DVI-I + 9-pin HDTV output

**Display resolution
support**

Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link).

HD-Out component Mode: YPrPB - SMPTE 1080i, 720p, 480p, 576p or composite Mode: NTSC/PAL 480i, 576i

NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®

RAMDAC

Dual 400MHz integrated

Architecture features

256-bit memory interface

128-bit IEEE floating-point precision graphics pipeline

128-bit colour precision

12-bit sub-pixel precision

8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm

Technical Specifications - Graphics

	Hardware accelerated anti-aliased points and lines
	Hardware OpenGL overlay planes
	Hardware accelerated two-sided lighting
	Hardware accelerated clipping planes
	3rd generation occlusion culling
	3D volumetric texture support
	Quad-buffered stereo
	Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz)
Shading architecture	Fully programmable GPU
	Long fragment programs (unlimited instructions)
	Long vertex programs (unlimited instructions)
	Looping and subroutines (up to 256 loops per vertex program)
	Dynamic flow control
	Conditional execution
Supported graphics APIs	OpenGL 2.0
	DirectX 9.0
Available graphics drivers	Microsoft Windows Vista 32 and 64, Microsoft Windows Vista 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

ATI FireGL V7200 graphics card	Form factor	ATX
	Graphics controller	R520
	Bus type	PCI-Express x16
	Memory	256MB GDDR3 graphics memory with unified frame buffer, Z-buffer and Texture storage and a 512-bit Ring-Bus memory controller
	Connectors	Dual DVI-I analog/digital, dual VGA analog support with DVI-to-VGA adapters. The DVI-I digital connectors are Dual Link capable. Stereoscopic 3D output connector with quad buffer support, HD Component Video (YPrPb) output with optional adapter.
	Maximum Resolution	Analog support for 2048x1536 @ 85Hz on each output connector. Digital support for 1920x1200 @ 60Hz on each output connector. Dual Link digital support for 2560x1600 @ 60Hz. Ideal for 30-inch widescreen displays. NOTE: Stereo supported on single display only.
	RAMDAC	Dual 10-bit per channel 400MHz
	Ring Bus memory controller	<ul style="list-style-type: none">• 512-bit internal ring bus for highly efficient memory reads• Programmable intelligent arbitration logic
	Image quality features	<ul style="list-style-type: none">• 2x/4x/6x Anti-aliasing modes; multi-sample algorithm with gamma correction, programmable sparse sample patterns, and centroid sampling• 2x/4x/8x/16x Anisotropic Filtering modes; up to 128-tap texture filtering• High resolution texture support (up to 4K x 4K)• Hardware supported overlays, anti-aliased points and lines, 2 sided lighting, occlusion culling

Technical Specifications - Graphics

Avivo video and display platform

- 64-bit per pixel floating point HDR supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing
- 32-bit integer HDR (10:10:10:2) format supported throughout the pipeline, includes support for blending and multi-sample anti-aliasing

Programmable video processor

- Accelerated MPEG-2, MPEG-4, DivX, WMV9, VC-1 and H.264 decoding and transcoding
- Seamless pixel shader integration with video in real-time

Display output

- 16-bit per channel floating point HDR and 10 bit per channel DVI output
- Programmable piecewise linear gamma correction, colour correction, and colour space conversion (10-bits per colour)
- Complete independent colour controls and video overlays for each display
- High quality pre- and post-scaling engines with underscan support for all outputs
- Content-adaptive de-flicker filtering for interlaced displays
- Xilleon TV encoder for high quality analog support
- Spatial/temporal dithering enables 10-bit colour quality on 8 and 6-bit displays
- VGA mode support on all outputs

Shading architecture

- Supports Microsoft DirectX 9.0 Shader Model 3.0 programmable vertex and pixel shaders in hardware
- Full speed 128-bit floating point processing for all shader operations
- Dedicated branch-execution units for high performance dynamic branching and flow control
- Dedicated texture address units for improved efficiency
- Up to 512 simultaneous pixel threads
- Multiple Render Target (MRT) support
- Render to vertex buffer support

Supported graphics APIs OpenGL 2.0
DirectX 9.0

Available graphics drivers Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional qualified drivers may be preloaded or available from the HP support Web site:
http://welcome.hp.com/country/us/eng/software_drivers.html.
HP-tested Windows XP and Linux

Technical Specifications - Graphics

NVIDIA Quadro FX 3500 PCI-Express graphics controller	Form Factor	ATX
	Graphics Controller	NVIDIA NV71GL-U
	Bus Type	PCI-Express x16
	Memory	256MB 700MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 dual-link DVI-I + 3-pin Mini DIN stereo output
	Display resolution support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft® Windows®
	Maximum Resolution	Dual DVI-I output - drives dual digital displays at resolutions up to 1920x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs - drives dual analog displays up to 2048x1536 @ 75Hz each
	RAMDAC	Dual 400MHz integrated
	Architecture Features	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit colour precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated anti-aliased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz) SLI Link
	Shading Architecture	Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (unlimited instructions) Long vertex programs (unlimited instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	Supported Graphics APIs	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
	Available Graphics Drivers	Microsoft Windows Vista 32 and 64, Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

NVIDIA Quadro FX 4500,	Bus Type	PCI Express x16
-------------------------------	-----------------	-----------------

Technical Specifications - Graphics

512 MB with optional G-Sync	RAMDAC	Dual 400 MHz integrated
	Memory	512 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Display resolution support	Dual integrated display controllers supporting up to 2048x1536 @ 75Hz (analog) or 3840x2400 @ 41Hz (digital) on both displays
	NVIDIA Quadro FX 4500 architecture	256-bit memory interface 35.2GB/sec. memory bandwidth Full 128-bit floating point colour precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware two-sided lighting 3rd-generation occlusion culling OpenGL quad-buffered stereo Hardware-Accelerated Pixel Read-Back
	Shading Architecture	16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling Fully programmable GPU (OpenGL2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	High Level Shader Languages	Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
	High-Resolution Antialiasing	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
	Display Resolution Support	Dual Dual Link DVI-I output-drives digital displays at resolutions up to 3840 x 2400 @ 41Hz Internal 400 MHz DACs - Two analog displays up to 2048x1536 @ 75 Hz each
	nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows®.
	Optional G-Sync	Delivers Frame lock/Genlock functionality to unprecedented levels of industrial realism, visualization and collaborative capabilities. Frame lock allows the display channels from multiple workstations to be synchronized, thus creating one large "virtual display" that can be driven by a multisystem

Technical Specifications - Graphics

cluster for performance scalability, while Genlock allows the graphics output to be synchronized to an external source, typically for film and broadcast video applications. The NVIDIA Quadro G-Sync requires an NVIDIA Quadro FX 4500 graphics controller and an available expansion slot.

Supported Graphics APIs OpenGL 2.0 ICD with immediate mode support for all OGL primitive types
DirectX 9.0c

Available Graphics drivers Microsoft Windows Vista 32 and 64, Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions.
HP qualified drivers may be preloaded or available from the HP support web site:

http://welcome.hp.com/country/us/eng/software_drivers.html

NVIDIA Quadro FX 4600 (768 MB)	Graphics Controller	NVIDIA Quadro FX 4600 Workstation GPU
	Bus Type	PCI Express x16
	RAMDAC	Dual 400 MHz integrated
	Memory	768 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 Dual-Link DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Multi-monitor Support	Dual integrated display controllers supporting up to to 2560x1600 @ 60Hz (both analog and digital) on both displays
	NVIDIA Quadro FX 4600 Architecture	384-bit memory interface 67.2 GB/sec. memory bandwidth Full 128-bit floating point colour precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware two-sided lighting 3rd-generation occlusion culling OpenGL quad-buffered stereo Hardware-Accelerated Pixel Read-Back
	Shading Architecture	16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling Fully programmable GPU (OpenGL2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution

Technical Specifications - Graphics

High Level Shader Languages	Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
High-Resolution Antialiasing	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
Display Resolution Support	Dual Dual Link DVI-I output-drives digital displays at resolutions up to 2560 x 1600 @ 60Hz Internal 400 MHz DACs – Two analog displays up to 2560x1600 @ 60 Hz
nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows®.
Supported Graphics APIs	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
Available Graphics drivers	Microsoft Windows XP Professional, Microsoft Windows Vista Professional, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html

Technical Specifications - Monitors

HP L1965 Flat Panel Monitor	Panel	Type	Active matrix, thin film transistor (TFT)	
		Viewable Image Area (diagonal)	19 inches; 48.25 cm maximum viewable	
		Screen Opening (WxH)	14.9 x 12.0 inches; 38.0 x 30.5 cm	
		Viewing Angle (typical)	178 degrees horizontal/178 degrees vertical (10:1 minimum contrast ratio)	
		Brightness (typical)	300 nits (cd/m ²)	
		Contrast Ratio (typical)	1000:1 (typical)	
		Response Rate (typical)	6 ms (typical gray to gray)**	
		Pixel Pitch	0.294 mm	
		Backlight Lamp Life (to half brightness)	50K hours	
		<i>* All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower. ** 20 ms rise and fall</i>		
		Video/Other Inputs	Plug and Play	Yes (supports VESA DDC2B and DDC/CI; PC2001 compliant)
Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)			
Input Signal	Two DVI-I connectors (VGA analog or digital)			
Input Impedance	75 ohms ± 2%			
Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)			
Video Cable	One DVI-D to DVI-D, and 1 DVI-I to VGA cables			
Video Cable Length	71 in (1.8 m)			
Signal Interface/ Performance	Horizontal Frequency			24 to 83 kHz
	Vertical Frequency			48 to 76 Hz
	Native Resolution			1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
	Maximum Resolution (Analog)			1280 x 1024 @ 75 Hz analog
	Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital		
	Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz		
		720 x 400 @ 70 Hz		
		800 x 600 @ 60 Hz, 72 Hz, 75 Hz		
		1024 x 768 @ 60 Hz, 70 Hz, 75 Hz		
		1280 x 1024 @ 60 Hz, 75 Hz		
	Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz		

Technical Specifications - Monitors

	Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz
	Preset SUN Mode	1152 x 900 @ 76 Hz
	Fail Safe Mode	Yes (limits out of range signal messages)
	Maximum Pixel Clock Speed	140 MHz
	User Programmable Modes	Yes, 15
	Anti-Glare	Yes
	Anti-Static	Yes
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	Default Colour Temperature	Yes (6500k, 9300k, SRGB, Custom User)
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	Languages	English, Spanish, French, German, Netherlands, Italian, Japanese, Simplified Chinese
	User Controls	Size and Positioning Contrast Brightness Clock, Clock Phase Selectable Colour Temperature Serial Number Mode Displayed Sleep Timer Input Selection Factory Reset
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply
	Input Power	100 ~ 240 VAC
	Nominal Current	1.5 A maximum
	Frequency	50 ~ 60 Hz
	Typical Power Consumption	< 35 watts
	Maximum	< 55 watts
	Power Saving	< 2 watts
	Off Mode	0 watts (when master power switch is in the off position)
	Power Cable Length	74.8 in (1.9 m); non-captive
Mechanical	Dimensions (H x W x D)	Unpacked with stand 14.85 min to 18.79 max x 15.9 x 8.78 inches (37.72 min to 47.72 max x 40.39 x 22.29 cm)
		Base Area (Footprint D x W) 8.78 x 11.88 inches (22.29 x 30.18 cm)

Technical Specifications - Monitors

	Panel only (without stand) (H x W x D)	12.96 x 15.9 x 2.4 inches (32.91 x 40.39 x 6.1 cm)	
Weight	Unpacked with stand	15.6 lbs (7.06 kg)	
	Unpacked without stand	9.26 lbs (4.19 kg)	
	Packaged	20.5 lbs (9.27 kg)	
Bezel Width	12.5 mm left and right, 12.75 mm top and bottom		
Tilt Range	-4 degrees to +30 degrees		
Swivel Range	± 45 degrees horizontal swivel		
Height Adjustable	Yes (4 in/100mm adjustment range)		
Pivot Rotation	Yes, 90 degrees		
Base	Ships attached and is removable		
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)	
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80%	
	Humidity – Non-operating	5% to 95%	
	Altitude – Operating	0 to 12,000 ft (0 to 3,658 m)	
	Altitude – Non-operating	0 to 40,000 feet; 0 to 12,192 m	
	Environmental Data	Eco-Label Certifications and Declarations	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:
			<ul style="list-style-type: none"> ● US Energy Star ● CECP

Energy Consumption (in accordance with US Energy Star test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
Normal Operation	35.7 watts	35.6 watts	35.1 watts
Sleep	1.08 watts	1.14watts	1.23 watts
Off	0.93 watts	0.94 watts	0.92 watts
Heat Dissipation*	100 VAC, 50 Hz	115 VAC, 60 Hz	230 VAC, 50 Hz
Normal Operation	121.7 BTU/hr	121.4 BTU/hr	119.7 BTU/hr
Sleep	3.68 BTU/hr	3.89 BTU/hr	4.19 BTU/hr
Off	3.17 BTU/hr	3.21 BTU/hr	3.14 BTU/hr

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Longevity and Upgrading Upgradeability features contained in the product include: One upstream and four downstream USB ports

Technical Specifications - Monitors

Ergonomics	The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.
Additional Information	<p>This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.</p> <p>Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</p> <p>Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.</p> <p>This product contains 100% recycled materials (by wt.) This product is 100% recycleable when properly disposed of at end of life.</p> <p>Packaging Materials</p> <ul style="list-style-type: none">● Corrugated - 0.955 kg● Plastic (other) - 0.055 kg● Polystyrene - 0.24 kg
Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none">● Asbestos● Certain Azo Colorants● Certain Brominated Flame Retardants - may not be used as flame retardants in plastics● Cadmium● Chlorinated Hydrocarbons● Chlorinated Paraffins● Formaldehyde● Halogenated Diphenyl Methanes● Lead carbonates and sulfates● Lead and Lead compounds● Mercuric Oxide Batteries● Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.● Ozone Depleting Substances● Polybrominated Biphenyls (PBBs)● Polybrominated Biphenyl Ethers (PBBEs)● Polybrominated Biphenyl Oxides (PBBOs)● Polychlorinated Biphenyl (PCB)● Polychlorinated Terphenyls (PCT)● Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.

Technical Specifications - Monitors

	Packaging	<ul style="list-style-type: none">● Radioactive Substances● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) <p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none">● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.● Design packaging materials for ease of disassembly.● Maximize the use of post-consumer recycled content materials in packaging materials.● Use readily recyclable packaging materials such as paper and corrugated materials.● Reduce size and weight of packages to improve transportation fuel efficiency.● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
	End-of-life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>
	Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment: Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates: http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</p>
Options	HP Silver Flat Panel Speaker Bar	<p>Powered directly by the monitor or PC, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately, part number EE418AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.</p>
Other	Accessories Included	<p>One DVI-D to DVI-D cable, one DVI-I to VGA cable, one USB cable, and CD-ROM with Pivot Pro software, HP Display Assistant software, and HP Display LiteSaver software.</p>
	Software	<p>Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless</p>

Technical Specifications - Monitors

portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.

HP Display Assistant is a software utility that allows monitor adjustment, colour calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC.

HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

User Guide Languages	English, Bahasa, B. Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish
Warranty Languages	English
Colour	Carbonite, two-tone carbonite and silver (EMEA only)
VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
Kensington Lock-ready	Yes
Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
Compatibility	VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP LP1965 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty	Three years parts, labour, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

HP Flat Panel Monitor LP2065	Panel	Type	20-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	20.1 inches; 51 cm

Technical Specifications - Monitors

	Screen Opening (W x H)	16.2 x 12.17 inches; 41.1 x 30.9 cm
	Viewing Angle (typical)*	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	Up to 300 nits (cd/m ²)
	Contrast Ratio (typical)*	Up to 800:1
	Response Rate (typical)*	8 ms (gray to gray), 16 ms (rise + fall)
	Pixel Pitch	0.255 mm
	Backlight Lamp Life (to half brightness)	45K hours
On Screen Display (OSD) Controls	Buttons or Switches	Input select, auto adjust/OSD up, OSD down, OSD menu select, power
	Languages	English, French, German, Spanish, Italian, Dutch, and Japanese
	User Controls	Brightness, contrast, positioning, colour temperature, individual colour control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset
	Signal Interface/ Performance	
	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input) 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 85 Hz 640 x 480 @ 60 Hz, 75 Hz, 85 Hz
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Colour Temperature	6500 K
Video Input	Plug and Play	Yes

Technical Specifications - Monitors

	Input Signal	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)
	Input Signal	Two DVI-I connectors (dual VGA analog or dual digital input possible)
	Input Impedance	75 ohms \pm 10%
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green
	Video Cable	Two VGA to DVI-I; two DVI-D to DVI-I
	Video Cable Length	5.9 ft (1.8 m)
Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
	Frequency	47.5 to 63 Hz
	Typical Power Consumption	55 watts (without USB ports); 70 watts (USB ports fully loaded)
	Maximum	< 75 W
	Power Saving	< 2 watts
	Power Cable Length	5.9 ft (1.8 m)
Mechanical	Dimensions (H x W x D)	<p>Unpacked with stand 16.7 to 21.8 x 17.4 x 8.67 in 42.5 to 55.5 x 44.3 x 22.0 cm</p> <p>Unpacked w/o stand (head only) 13.58 x 17.4 x 3.42 in 34.5 x 44.3 x 8.7 cm</p> <p>Packaged 11.77 x 22.2 x 16.77 in 29.9 x 56.4 x 42.6 cm</p>
	Weight	<p>Unpacked With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)</p> <p>Packaged 26.3 lb (11.95 kg)</p>
	Tilt Range	-5° to + 25° vertical tilt
	Swivel Range	-45° to + 45°
	Height Adjustable	Yes, range 5.1 inches; 13.0 cm
	Pivot Rotation	Yes
	Base	Detachable, ships attached
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)
	Humidity – Operating	20% to 80% non-condensing
	Humidity – Non-operating	5% to 85%

Technical Specifications - Monitors

	Altitude – Operating	+12,000 ft (+3,657.6 m)
	Altitude – Non-operating	+40,000 ft (+12,192 m)
Options	HP Silver Flat Panel Speaker Bar - Part number: EE418AA	Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Silver Flat Panel Speaker Bar QuickSpec.
Other	Accessories Included	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector. DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Software	HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCL. HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to save power and backlight life. Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	User Guide Languages	English
	Warranty Languages	English
	Colour	Carbonite/Silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		Canadian Requirements/CSA, CE Marking, CISPR Requirements, , Energy Star Compliant, FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)

Technical Specifications - Monitors

Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Three years parts, labour, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP Flat Panel Monitor LP2465	Panel	Type	24-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	24 inches; 60.96 cm
		Screen Opening (W x H)	20.47 x 12.83 inches; 52.0 x 32.6 cm
		Viewing Angle (typical)*	178° H/ 178° V (10:1 minimum contrast ratio)
		Brightness (typical)*	500 nits (cd/m ²)
		Contrast Ratio (typical)*	1000:1
		Response Rate (typical)*	8 ms (typical gray to gray)
		Pixel Pitch	0.270 mm
		Backlight Lamp Life (to half brightness)	50K hours
			<i>*Response time 13 ms rise and fall, 6 ms gray to gray.</i>
	On Screen Display (OSD) Controls	Buttons or Switches	Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power
		Languages	English, French, German, Spanish, Italian, Japanese, Dutch
		User Controls	Brightness, contrast, positioning, colour temperature, individual colour control, serial number display, full screen resolutions, clock, clock phase, input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset
	Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)
		Vertical Frequency	48 to 85 Hz (VGA and DVI input)
		Native Resolution	1920 x 1200 @ 60 Hz (recommended) (native aspect ratio of 16:10)
		Preset VESA Graphic Modes (non-interlaced)	1920 x 1200 @ 60 Hz 1600 x 1200 @ 60 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 75 Hz 640 x 480 @ 60 Hz, 75 Hz

Technical Specifications - Monitors

	Text Mode	720 x 400 @ 70 Hz	
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz	
	Sun Mode	1152 x 900 @ 66 Hz	
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 20	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Colour Temperature	6500 K	
Video/Other Inputs	Plug and Play	Yes	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (located on side of monitor, cable included)	
	Input Signal	Two DVI-I (VGA analog and digital) inputs	
	Input Impedance	75 ohms \pm 10%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	Video Cable	VGA to DVI-I; DVI-D to DVI-D	
	Video Cable Length	5.9 ft (1.8 m)	
Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Typical Power Consumption	75 watts	
	Maximum	< 110 watts	
	Power Saving	< 2 watts	
	Power Cable Length	6.2 ft (1.9 m)	
Mechanical	Dimensions (H x W x D)	Unpacked w/ stand	14.6 (min) to 19.7 (max) x 22 x 9.1 in (37.1 (min) to 50.1 (max) x 55.4 x 23.2 cm
		Unpacked w/o stand (head only)	14.4 x 22 x 3.7 in 36.6 x 55.84 x 9.2 cm
		Packaged	11.7 x 22.1 x 25.6 in 29.8 x 56.0 x 65.1 cm
	Weight	Unpacked	23.6 lbs (10.7 kg)
		Packaged	23.6 lbs (10.7 kg)
	Tilt Range	-5° to + 25° vertical	
	Swivel Range	-45° to + 45°	
	Height Adjustable	Yes, range 5.1 inches; 130 mm	

Technical Specifications - Monitors

	Pivot Rotation	Yes
	Base	Detachable, ships detached
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)
	Humidity – Operating	20% to 80% non-condensing
	Humidity – Non-operating	5% to 85%
	Altitude – Operating	+12,000 ft (+3,657.6 m)
	Altitude – Non-operating	+40,000 ft (+12,192 m)
Other	Accessories Included	VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-D cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese. HP Display Assistant is a software utility that allows monitor adjustment, colour calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC. HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese

Technical Specifications - Monitors

	Colour	Carbonite/silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Options	HP Silver Flat Panel Speaker Bar - Part number: EE418AA	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
Compatibility		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty		Three years parts, labour, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

Technical Specifications - Monitors

HP LP3065 Flat Panel Monitor	Panel	Type	30.0-inch Wide Format Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	29.77 in (75.623 cm)
		Screen Opening (W x H)	25.3 x 15.8 in (64.3 x 40.3 cm)
		Viewing Angle (typical)*	Up to 178° H/ 178° V (10:1 minimum contrast ratio)
		Brightness (typical)*	300 nits (cd/m2)
		Contrast Ratio (typical)*	1000:1
		Response Rate (typical)*	12 ms (8 ms average gray to gray)
		Pixel Pitch	0.250 mm
		Backlight Lamp Life (to half brightness)	40K hours
		Colour Gamut	92% of NTSC
On Screen Display (OSD) Controls	Buttons or Switches	Input select, brightness up, brightness down, power	
	User Controls	Brightness, input selection	
	Signal Interface/ Performance	Horizontal Frequency	100 KHz
	Vertical Frequency	60 Hz	
	Native Resolution	2560 x 1600 @ 60 Hz (native aspect ratio of 16:10)	
	Pixel Clock Speed	275 MHz	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Colour Temperature	6500 K	
Video/Other Inputs	Plug and Play	Yes	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (located on side of monitor, cable included)	
	Input Signal	Three dual-link DVI-D inputs (Windows PC and graphics card that supports DVI ports with dual-link digital bandwidth and VESA DDC standard for plug-and-play setup requires a DVI-D dual-link graphic card that supports WQXGA (2560 x 1600) resolution.)	
	Video Cable	Two dual-link DVI cables	
	Video Cable Length	5.9 ft (1.8 m)	
Power	Input Power	Auto-Ranging, 100 to 240 VAC; internal power supply, 50 Hz/60 Hz	
	Typical Power Consumption	118 watts	

Technical Specifications - Monitors

	Maximum	< 176 watts		
	Power Saving	< 2 watts		
	Power Cable Length	5.9 ft (1.8 m)		
Mechanical	Dimensions (H x W x D)	Unpacked w/ stand	19.3 to 23.2 x 27.2 x 9.5in (49.0 to 59.0 x 69.2 x 24.0 cm)	
		Unpacked w/o stand (head only)	17.9 x 27.2 x 3.3 in (45.5 x 69.2 x 8.4 cm)	
		Packaged	22.4 x 31.1 x 14.9 in (56.8 x 79.0 x 37.8 cm)	
		Weight	Unpacked	30.6 lbs (13.9 kg)
Environmental	Tilt Range	-5° to + 30° vertical		
	Swivel Range	-45° to + 45°		
	Height Adjustable	Yes, range 5.1 in (100 mm)		
	Pivot Rotation	No		
	Base	Detachable, ships detached		
	Temperature – Operating	46° to 95° F (10° to 35° C)		
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)		
	Humidity – Operating	20% to 80% non-condensing		
	Humidity – Non-operating	5% to 85%		
	Altitude – Operating	+12,000 ft		
Altitude – Non-operating	+40,000 ft			
Environmental Data	Eco-Label Certifications and Declarations	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> ● US Federal Energy Management Program (FEMP) ● IT Eco Declaration ● TCO 03 ● Taiwan Green Mark ● CECP ● Korea Eco-label ● EPEAT - Silver 		
	Energy Consumption (in accordance with US Energy Star test method)	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
	Normal Operation	102.8 watts	101.7 watts	100.4watts
	Sleep¹	2 watts	2 watts	2 watts

Technical Specifications - Monitors

Off	0.05 watts	0.06 watts	0.25 watts
Heat Dissipation²	AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz	AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz	AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz
Normal Operation	350.8 BTU/hr	347.0 BTU/hr	342.6 BTU/hr
Sleep	6.8 BTU/hr	6.8 BTU/hr	6.8 BTU/hr
Off	0.2 BTU/hr	0.2 BTU/hr	0.9 BTU/hr

NOTES

¹This sleep status ignore the input sync signal check cycle when metering the model in sleep mode.

²Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Longevity and Upgrading Upgradeability features contained in the product include:

One upstream and four downstream USB ports

Ergonomics

The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.

Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the SILVER level, see www.epeat.net.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per MPR-II, TCO, and prEN50279 A/B/C.

This product contains 0% recycled materials (by wt.)

This product is 97.6% recyclable when properly disposed of at end of life.

Packaging Materials

- Corrugated Paper 2.19 kg
- PE-LD Bags 0.09 kg

Technical Specifications - Monitors

RoHS Compliance

- EPS Molded Foam 1.07 kg

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

Technical Specifications - Monitors

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information For more information about HP's commitment to the environment:
Global Citizenship Report
<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>
Eco-label certifications
<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>
ISO 14001 certificates:
<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Other

Accessories Included Two dual link DVI-D to DVI-D cables - connects the graphic card's DVI-D digital connector to the monitor's input (DVI-D digital) connectors; power cord

Software HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

User Guide Languages English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish

Technical Specifications - Monitors

	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Colour	Carbonite
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Options	HP Flat Panel Speaker Bar - Part number: EE418AA	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals.
Compatibility		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty		Three years parts, labour, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

© Copyright 2008 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. NVIDIA and Quadro are trademarks of NVIDIA Corporation. All other product names mentioned herein may be trademarks of their respective companies.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty.